

Product: RUBIN LOOK LED COMPACT 4000 PLX E 21 840 / 595X320MM

Index: 19.4249.1121.21



Description

Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms.

Product information


| | |
|----------|---|
| Category | Compact |
| Family | RUBIN LOOK LED COMPACT |
| Name | RUBIN LOOK LED COMPACT 4000 PLX E 21 840 / 595X320MM |
| Index | 19.4249.1121.21 |
| EAN | 5902107163341 |



Light and electrical data


| | |
|-------------------------------------|---|
| Light source | LED |
| Luminous flux LED [lm] | 4118 |
| LED power [W] | 25 |
| Luminaire luminous flux [lm] | 2945 |
| Power of luminaire [W] | 27 |
| Luminaire's light efficiency [lm/W] | 109,1 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 108,2° / 107,2° |
| Protection against electric shock | I |
| Protection degree | IP40 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 60000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 22 (B10), 34 (B16), 33 (C10), 54 (C16) |

Mechanical data

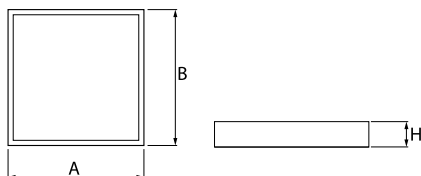

| | |
|------------------|--|
| Assembly | surface mounted on ceiling |
| Material | steel sheet |
| Color | RAL 9006 (grey, metallic, fine structure) |
| Diffuser | PLX (PMMA opal) |
| Impact resistant | IK04 |
| Weight [kg] | 2,19 |
| Dimensions [mm] | 595 x 320 x 54 |

A graph of light

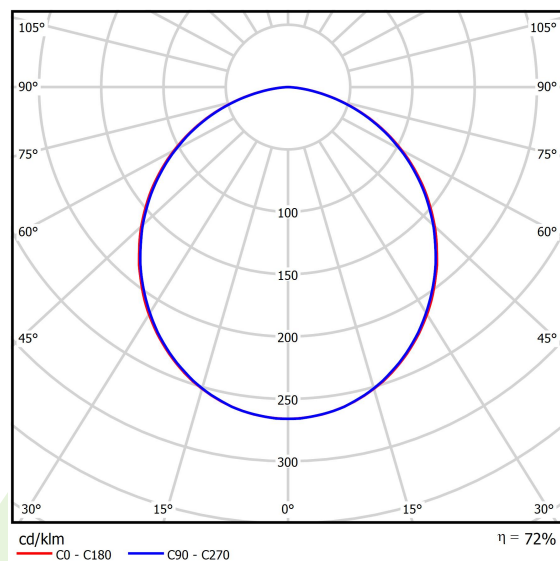

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
 Technical data may be changed. Photos of the luminaires may differ from reality.
 Date of last update: 22-08-2025