

Product: RUBIN LOOK LED COMPACT 4000 PLX E 34 840 / 595X320MM

Index: 19.4249.1121.34



Description

Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms.

Product information


Category	Compact
Family	RUBIN LOOK LED COMPACT
Name	RUBIN LOOK LED COMPACT 4000 PLX E 34 840 / 595X320MM
Index	19.4249.1121.34
EAN	5902107218089



Light and electrical data



Light source	LED
Luminous flux LED [lm]	4118
LED power [W]	25
Luminaire luminous flux [lm]	2945
Power of luminaire [W]	27
Luminaire's light efficiency [lm/W]	109,1
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 108,2° / 107,2°
Protection against electric shock	I
Protection degree	IP40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	22 (B10), 34 (B16), 33 (C10), 54 (C16)

Mechanical data

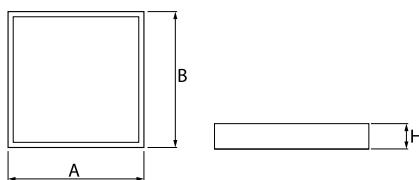

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	2,1
Dimensions [mm]	595 x 320 x 54

A graph of light

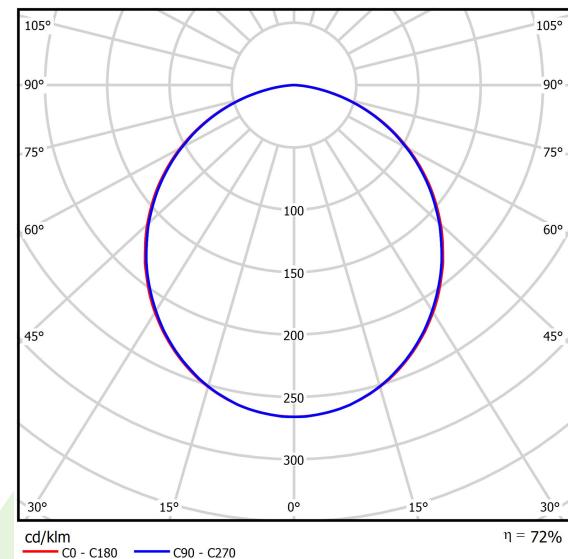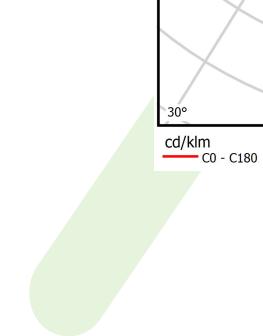

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026