


Product: RUBIN LOOK LED SMOOTH COMPACT 3000 PLX E PIR 21 840

Index: 19.4250.122D.21

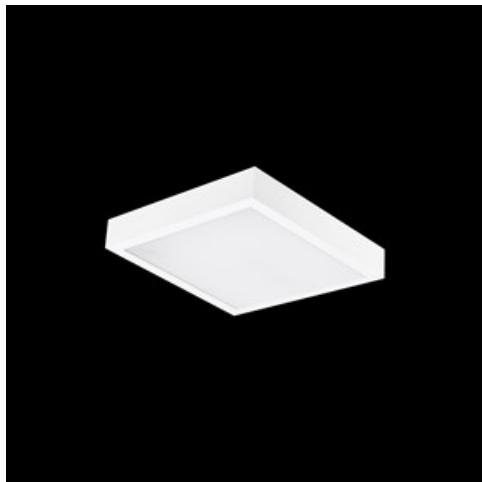

## Description

Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms. Luminaire equipped with a PIR sensor. Number of sensor on/off cycles greater than 100000.

## Product information


Category	Compact
Family	RUBIN LOOK LED SMOOTH COMPACT
Name	RUBIN LOOK LED SMOOTH COMPACT 3000 PLX E PIR 21 840
Index	19.4250.122D.21
EAN	5902107208806



## Light and electrical data



Light source	LED
Luminous flux LED [lm]	3381
LED power [W]	15,3
Luminaire luminous flux [lm]	2558
Power of luminaire [W]	20,1
Luminaire's light efficiency [lm/W]	127,3
Color of the light [K]	4000
CRI	>80
Beam angle [°]	(C0-C180) / (C90-C270) - 111,6° / 112,4°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 80000 (2)
Lx/By	L70/B10 (1) / L80/B10 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	45 (B10), 75 (B16), 45 (C10), 75 (C16)

## Mechanical data

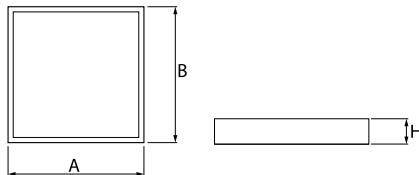

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9006 (grey, metallic, fine structure)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	2,13
Dimensions [mm]	365 x 365 x 50

## A graph of light

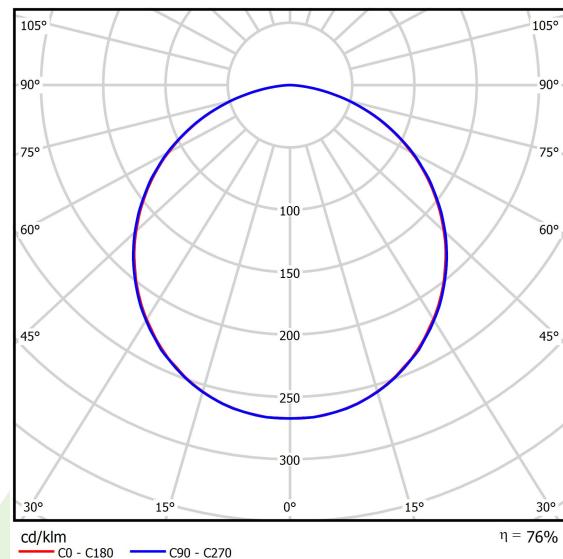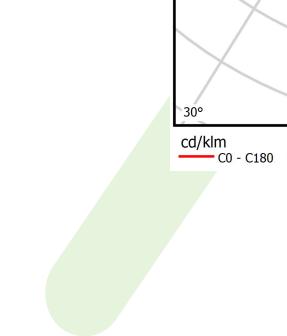

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026