

**Product:** AGAT LED 6600 MICRO-PRM E 34 840 / 600X600

**Index:** 19.4258.3221.34



## Description

Luminaire dedicated for module and suspended ceilings with the T24 grid, equipped with the highly efficient LED sources. Luminaire body made from steel sheet, powder coated in white. Monolithic construction is the characteristic feature of the luminaire (remaining in one-piece during exploitation process). Luminaire available in PLX or Micro-PRM diffuser. Luminaire dedicated for the public use structure.

## Product information


Category	Recessed luminaires
Family	AGAT LED
Name	AGAT LED 6600 MICRO-PRM E 34 840 / 600X600
Index	19.4258.3221.34



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	6848
LED power [W]	33,7
Luminaire luminous flux [lm]	5817
Power of luminaire [W]	35,3
Luminaire's light efficiency [lm/W]	164,8
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 89° / 89°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20/44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	16 (B10), 25 (B16), 26(C10), 42 (C16)

## Mechanical data

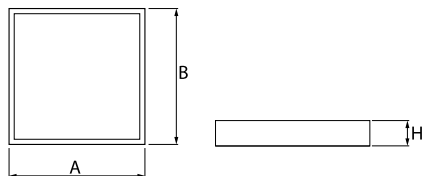

Assembly	<b>mounted in module ceilings</b>
Material	<b>steel sheet</b>
Color	<b>RAL 9016 (white)</b>
Diffuser	<b>Micro-PRM (micro-prismatic diffuser PMMA)</b>
Impact resistant	<b>IK04</b>
Weight [kg]	<b>5,26</b>
Dimensions [mm]	<b>596 x 596 x 90</b>

## A graph of light

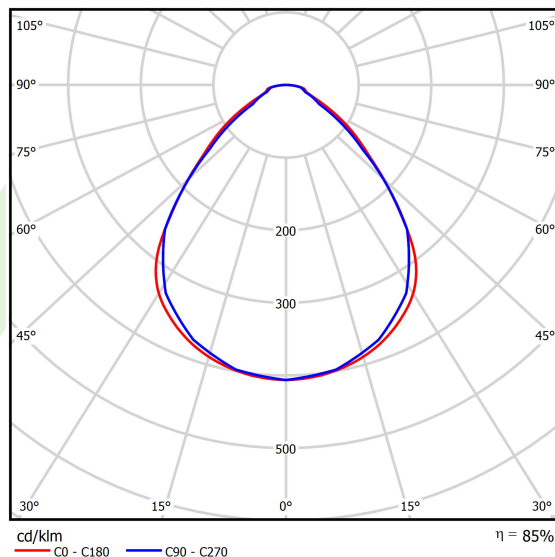

## Accessories

Index 2C1A7392-34R

Name EUROPANEL / BACKPANEL / RIM  
COMPACT LED RECESSED  
ACCESSORIES 34 / 600X600

