

Product: ATENA LINE NEW OUTDOOR RECESSED LED 12000 SH WIDE EDD IP65 04 850 / KRATA

Index: 19.4203.1663.04



Description

Industrial luminaire dedicated to be mounted in suspended ceiling/board with a thickness of 10 to 50 mm. The external application is possible due to the fact that the product is equipped with a pressure compensation valve, and the housing has a special painting adapted to the external conditions. Rectangular housing made of aluminum sheet. Anodized profile to increase the corrosion resistance of the luminaire. Only one colour available: RAL 9005 (black). Upon client request there is a possibility to make longer luminaire than standard dimensions. Consequently, the luminaire will have bigger luminous flux. The light sources are protected by diffuser made of hardened glass and the whole construction is characterized by high level of protection against dust and water penetration-IP65.

Product information


Category	Outdoor luminaires
Family	ATENA LINE NEW OUTDOOR RECESSED LED
Name	ATENA LINE NEW OUTDOOR RECESSED LED 12000 SH WIDE EDD IP65 04 850 / KRATA
Index	19.4203.1663.04
EAN	5902107288211



Light and electrical data



Light source	LED
Luminous flux LED [lm]	12006
LED power [W]	73
Luminaire luminous flux [lm]	9901
Power of luminaire [W]	81
Luminaire's light efficiency [lm/W]	122,2
Color of the light [K]	5000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 93,8° / 89,6°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	83000
Lx/By	L90/B10
Operating temperature range [°C]	-25 ÷ 40
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 22 (B16), 14 (C10), 22 (C16)

Mechanical data



Assembly	mounted in suspended ceiling/board
Material	aluminum
Color	RAL 9005 (black)
Diffuser	SH (transparent hardened glass)
Impact resistant	IK08
Weight [kg]	9,32
Dimensions [mm]	596 x 250 x 200

A graph of light

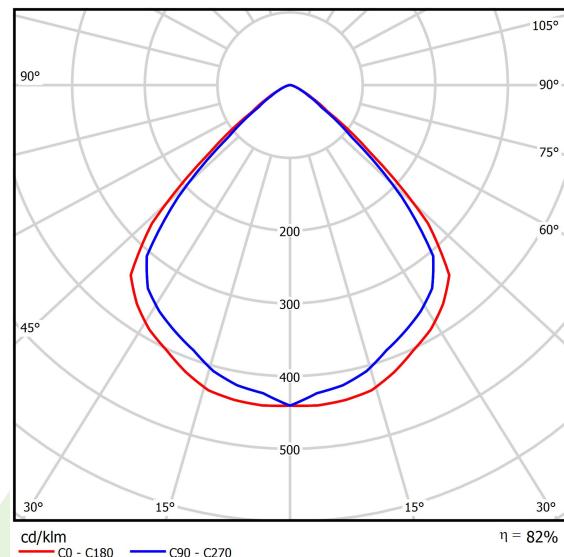

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026