

Product: RUBIN INDUSTRY SLIGHT LED 24000 OPTICS-2L SH IP65 E 34 840 / 1270X320MM HT45

Index: 19.4205.1421.34



Description

Luminary dedicated for big space industry areas. ceiling mounting. Light distribution made by using high performance lenses. Luminary body made from steel sheet, powder coated in white. The product is recommended for production halls, warehouses and heavy industry.

Product information


Category	Industrial luminaires
Family	RUBIN INDUSTRY SLIGHT LED
Name	RUBIN INDUSTRY SLIGHT LED 24000 OPTICS-2L SH IP65 E 34 840 / 1270X320MM HT45
Index	19.4205.1421.34
EAN	5902107200992



Light and electrical data



Light source	LED
Luminous flux LED [lm]	24990
LED power [W]	153
Luminaire luminous flux [lm]	20999
Power of luminaire [W]	171
Luminaire's light efficiency [lm/W]	122,8
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 56,4° / 92,6°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	-25 ÷ 45
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 22 (B16), 14 (C10), 22 (C16)

Mechanical data

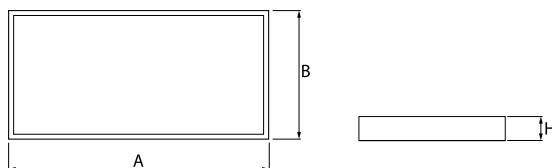

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	SH (transparent hardened glass)
Impact resistant	IK08
Dimensions [mm]	1270 x 320 x 55

A graph of light

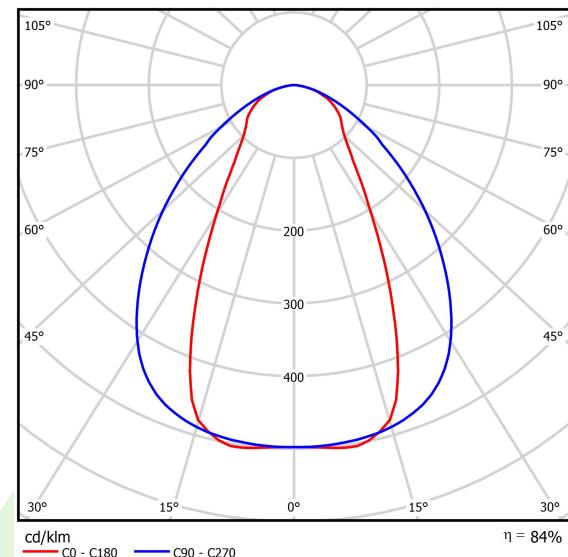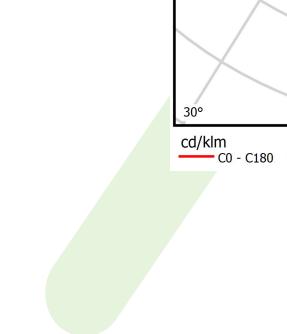

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026