

Product: NEPTUN LED 8800 GRP OPAL E IP65 840 / L-1200 B1-GLUED/C3 Index: 19.4208.2321.00



Description

The luminaires housing made of polyester reinforced by fire-resistant glass fibre in light gray colour (RAL 7035). Application of this material ensures resistance to thermal, mechanical and chemical agents activity. Opalized diffusor is made of PMMA and is installed in luminaires body indelibly by using special adhesive sealant. This way of connection guarantees resistance against dust and water penetration to inside of the luminaire. The material which luminaire is made of and the way it is bonded ensures the resistance to chemical substances used in food industry.


Product information	Category Industrial luminair	es
	Family NEPTUN LED GRP	
	Name NEPTUN LED 8800	GRP OPAL E IP65 840 / L-1200 B1-GLUED/C3
	Index 19.4208.2321.00	
	EAN 5902107199654	
Light and electrical data	Light source	LED
	Luminous flux LED [Im]	9130
	LED power [W]	46,8
	Luminaire luminous flux [lm]	7854
	Power of luminaire [W]	49,1
	Luminaire's light efficiency [lm/	W] 160
	Color of the light [K]	4000
	CRI	>80
	SDCM (LED sources)	3
	Beam angle [°]	(C0-C180) / (C90-C270) - 120,2° / 100,4°
	Protection against electric shoe	ck I
	Protection degree	IP65
	Voltage	220240 V, 5060 Hz
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)
	Lx/By	L80/B10 (1) / L70/B50 (2)
	Operating temperature range [[°C] -25 ÷ 30
	Driver	standard on/off (E)
	Power factor $\cos \phi$	>0,95
	Circuit load capacity	15 (B10), 25 (B16), 24 (C10), 38 (C16)
		directly mounted to ceiling construction or surface mounted on slings
		oolyester reinforced by fire-resistant glass ibre
	Color I	ight grey (RAL7035)
	Diffuser F	PMMA opal
	lucino est ve eleterat	1/10

Impact resistant

Dimensions [mm]

IK10

1277 x 116 x 99

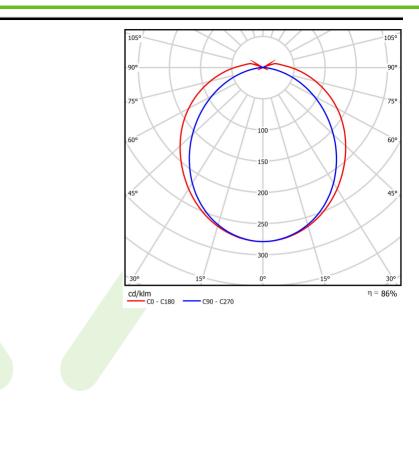



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 22-08-2025