

**Product:** RUBIN LOOK LED S SMOOTH 5400 PLX E IP44 21 830 / 620X620MM

**Index:** 19.4363.2311.21



## Description

Surface mounted luminaire equipped in highly efficient LED sources. Luminaire body made from steel sheet, powder coated.

## Product information


Category	Surface mounted luminaires
Family	RUBIN LOOK LED SMOOTH
Name	RUBIN LOOK LED S SMOOTH 5400 PLX E IP44 21 830 / 620X620MM
Index	19.4363.2311.21
EAN	5902107061692



## Light and electrical data

Light source	LED
Luminous flux LED [lm]	5670
LED power [W]	30,6
Luminaire luminous flux [lm]	4265
Power of luminaire [W]	33,2
Luminaire's light efficiency [lm/W]	128,5
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109,6° / 109,6°
Protection against electric shock	I
Protection degree	IP44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	12 (B10), 19 (B16), 20 (C10), 32 (C16)

## Mechanical data

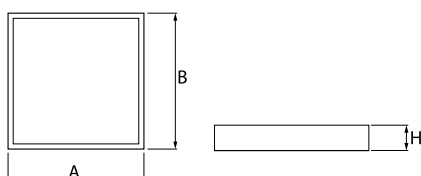

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9006 (grey, metallic, fine structure)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	6,84
Dimensions [mm]	620 x 620 x 56

A graph of light

