

Product: RUBIN LOOK LED S SMOOTH 7500 PLX E IP44 34 840 / 620X620MM

Index: 19.4363.2421.34



Description

Surface mounted luminaire equipped in highly efficient LED sources. Luminaire body made from steel sheet, powder coated.

Product information


Category	Surface mounted luminaires
Family	RUBIN LOOK LED SMOOTH
Name	RUBIN LOOK LED S SMOOTH 7500 PLX E IP44 34 840 / 620X620MM
Index	19.4363.2421.34
EAN	5901867472441



Light and electrical data



Light source	LED
Luminous flux LED [lm]	7854
LED power [W]	39,8
Luminaire luminous flux [lm]	5908
Power of luminaire [W]	42,2
Luminaire's light efficiency [lm/W]	140
Color of the light [K]	4000
CRI	>80
Beam angle [°]	(C0-C180) / (C90-C270) - 109,6° / 109,6°
Protection against electric shock	I
Protection degree	IP44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	54000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	12 (B10), 20 (B16), 21 (C10), 34 (C16)

Mechanical data

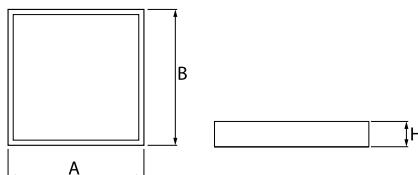

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Dimensions [mm]	620 x 620 x 56

A graph of light

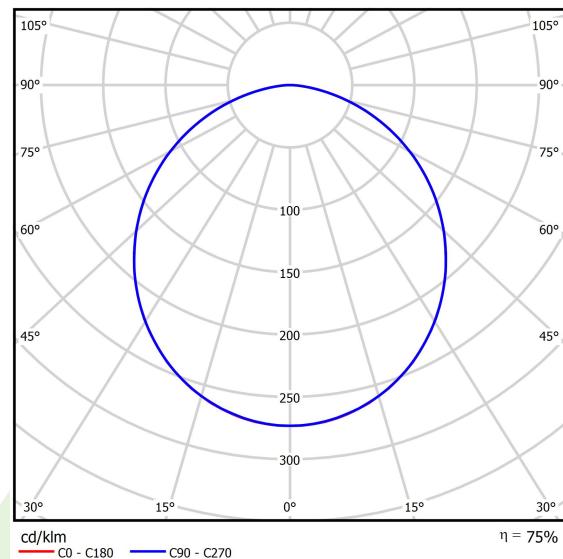

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026