

Product: RUBIN LOOK LED S SMOOTH 2700 PLX EDD IP44 21 840 / 620X365MM

Index: 19.4363.3123.21



## Description

Surface mounted luminaire equipped in highly efficient LED sources. Luminary body made from steel sheet, powder coated.

## Product information


Category	Surface mounted luminaires
Family	RUBIN LOOK LED SMOOTH
Name	RUBIN LOOK LED S SMOOTH 2700 PLX EDD IP44 21 840 / 620X365MM
Index	19.4363.3123.21
EAN	5902107073633



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	2835
LED power [W]	15,3
Luminaire luminous flux [lm]	2132
Power of luminaire [W]	16,3
Luminaire's light efficiency [lm/W]	130,8
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109,6° / 109,6°
Protection against electric shock	I
Protection degree	IP44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 24 (B16), 22 (C10), 36 (C16)

## Mechanical data

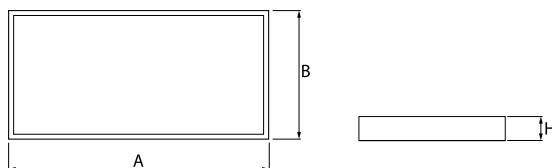

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9006 (grey, metallic, fine structure)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	4,45
Dimensions [mm]	620 x 365 x 56

## A graph of light

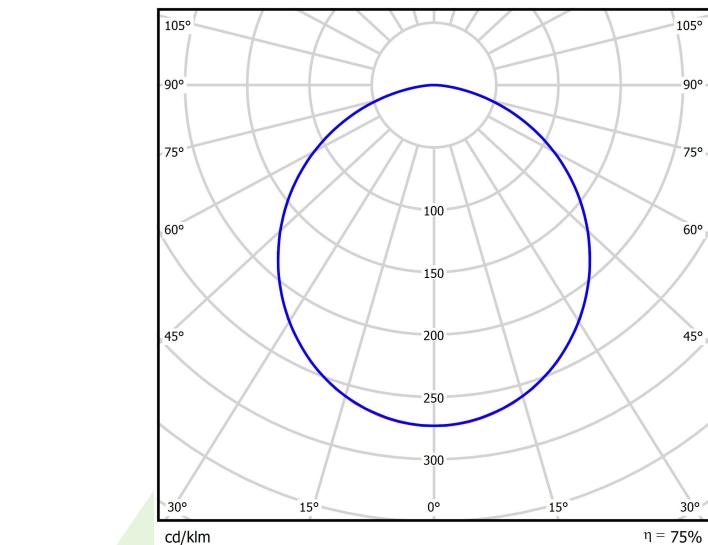

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026