

Product: RUBIN LOOK LED P SMOOTH 2700 PLX E IP44 34 840 / 620X365MM

Index: 19.4363.3621.34



Description

Surface mounted luminaire equipped in highly efficient LED sources. Luminary body made from steel sheet, powder coated.

Product information

Category	Surface mounted luminaires
Family	RUBIN LOOK LED SMOOTH
Name	RUBIN LOOK LED P SMOOTH 2700 PLX E IP44 34 840 / 620X365MM
Index	19.4363.3621.34
EAN	5902107061791



Light and electrical data



Light source	LED
Luminous flux LED [lm]	2835
LED power [W]	15,3
Luminaire luminous flux [lm]	2132
Power of luminaire [W]	16,3
Luminaire's light efficiency [lm/W]	130,8
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109,6° / 109,6°
Protection against electric shock	I
Protection degree	IP44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	15 (B10), 24 (B16), 24 (C10), 40 (C16)

Mechanical data



Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Weight [kg]	4,35
Dimensions [mm]	620 x 365 x 56

A graph of light

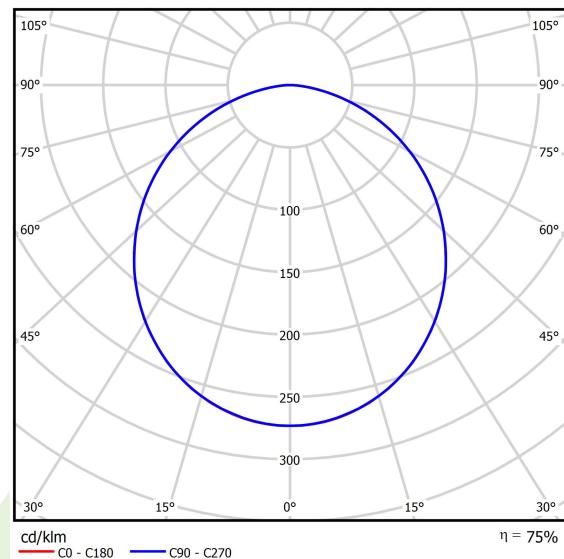

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-01-2026