

## Product: GRANVIA PRO 13000 OVAL E 34 IP54 840 / L-1500MM Index: 19.4381.2521.34

## -----

## Description

A cutting-edge energy-efficient linear luminaire, designed to deliver exceptional lighting performance for industrial, warehouse, and commercial spaces. With an impressive luminous efficiency up to 197 lm/W, this advanced lighting system ensures maximum performance while minimizing energy consumption. Installation is tool-less, making the process easy and quick, allowing you to create long lines of light with minimal effort. This luminaire is a perfect solution for supermarkets, large warehouses, and other retail and industrial spaces, offering efficient and sustainable illumination tailored to specific needs. Luminaire is available with 7 different light distributions, IP20 and IP54 version as well as with an option of customised body colour, colour temperature and CRI to match exact needs of most demanding projects.

Product information	Category	Industrial luminaires		
	Family	GRANVIA PRO		
	Name	GRANVIA PRO 13000 OVAL E 34 IP54 840 / L-1500MM		
	Index	19.4381.2521.34		
	EAN	5902107609962		
Light and electrical data	Light sour	ce LED		
	Luminous	flux LED [lm] 13005,4		
	LED powe	er [W] 62,5		
	Luminaire	luminous flux [lm] 12398,4		
	Power of I	luminaire [W] 70		
	Luminaire	's light efficiency [lm/W] 177,1		
	Color of th	ne light [K] 4000		
	CRI	>80		
	SDCM (LE	ED sources) 3		
	Beam ang	le [°] (C0-C180) / (C90-C27	0) - 45,4° / 76,6°	
	Photobiolo 62471)	ogical risk class (IEC/EN RG0		
	Protection	against electric shock		
	Protection	l degree IP54		
	Voltage	220240 V, 5060 Hz		
	Lifetime of	f LED sources [h] 100000		
	Lx/By	L80/B10		
	Operating	temperature range [°C] -20 ÷ 35		
	Driver	standard on/off (E)		


Power factor  $\cos \phi$ 

Circuit load capacity

>0,95 16 (B10), 26 (B16), 23 (C10), 37 (C16)

Mechanical data	Assembly	directly mounted to ceiling construction or surface mounted on slings
	Material	steel sheet
	Color	RAL 9016 (white)
	Diffuser	optical system based on PMMA lenses
Α	Impact resistant	IK06
	Dimensions [mm]	1500 x 72 x 66

## A graph of light

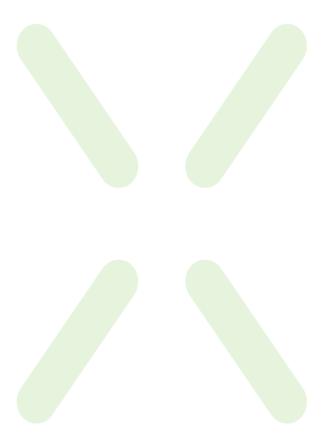

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 22-08-2025