


**Product:** RUBIN CLEAN-ECO LED 8800 SHM EDD IP65 34 830 / 620X620MM

**Index:** 19.4387.3213.34

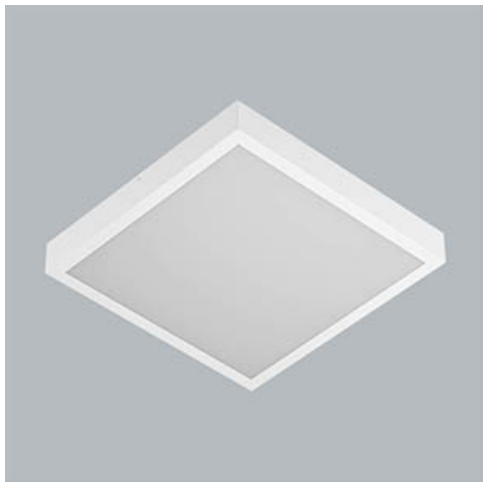

## Description

Surface mounted luminary equipped in highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.

## Product information

Category	Clean luminaires - surface
Family	RUBIN CLEAN-ECO LED
Name	RUBIN CLEAN-ECO LED 8800 SHM EDD IP65 34 830 / 620X620MM
Index	19.4387.3213.34
EAN	5902107870102



## Light and electrical data

Light source	LED
Luminous flux LED [lm]	8883,4
LED power [W]	43,6
Luminaire luminous flux [lm]	7382
Power of luminaire [W]	48,8
Luminaire's light efficiency [lm/W]	151,3
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 109,6° / 109,6°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	0,95
Circuit load capacity	14 (B10), 23 (B16), 22 (C10), 35 (C16)

Mechanical data



Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	SHM (hardened mat glass)
Impact resistant	IK08
Dimensions [mm]	620 x 620 x 85

A graph of light

