


**Product:** RUBIN CLEAN-ECO LED CRI95 5400 MICRO-PRM SH EDD IP65 34 930 / 620X620MM

**Index:** 19.4388.4133.34

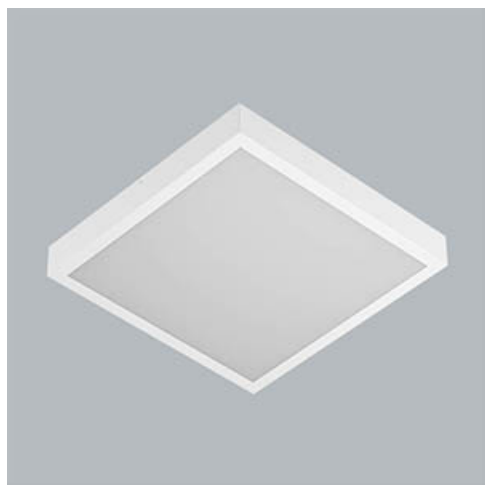

## Description

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminaire recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Surface mounted luminaire equipped in highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame.

## Product information


Category	Clean luminaires CRI95
Family	RUBIN CLEAN-ECO LED CRI95
Name	RUBIN CLEAN-ECO LED CRI95 5400 MICRO-PRM SH EDD IP65 34 930 / 620X620MM
Index	19.4388.4133.34
EAN	5902107870188



## Light and electrical data

Light source	LED
Luminous flux LED [lm]	5964,5
LED power [W]	36,3
Luminaire luminous flux [lm]	4611
Power of luminaire [W]	40,7
Luminaire's light efficiency [lm/W]	113,3
Color of the light [K]	3000
CRI	>90
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 89° / 89°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	80000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	0,95
Circuit load capacity	14 (B10), 23 (B16), 22 (C10), 35 (C16)

**Mechanical data**

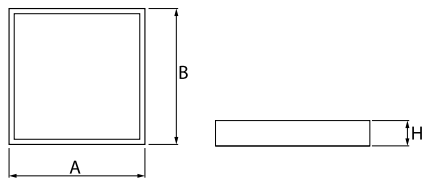

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass)
Impact resistant	IK08
Dimensions [mm]	620 x 620 x 85

**A graph of light**

