

**Product:** ATENA LED PRO 30000 OPTICS-90 E IP65 04 840

**Index:** 19.4394.2221.04



## Description

Atena LED Pro is a solution for industrial spaces, combining efficiency of over 200 lm/W, durability, and adaptability. Its aerodynamic design enables passive cooling, while flexible mounting options and accessories like anti-glare systems and motion sensors enhance its versatility. Built to perform in tough conditions with temperatures from -40°C to +40°C, Atena LED Pro is reliable, efficient, and tailored for excellence.

## Product information


|          |   |
|----------|---|
| Category | Industrial luminaires                       |
| Family   | ATENA LED PRO                               |
| Name     | ATENA LED PRO 30000 OPTICS-90 E IP65 04 840 |
| Index    | 19.4394.2221.04                             |
| EAN      | 5902107636128                               |



## Light and electrical data


|   |  |
|---|--|
| Light source                              | LED                                    |
| Luminous flux LED [lm]                    | 30641,3                                |
| LED power [W]                             | 139,7                                  |
| Luminaire luminous flux [lm]              | 30028,5                                |
| Power of luminaire [W]                    | 147,5                                  |
| Luminaire's light efficiency [lm/W]       | 203,6                                  |
| Color of the light [K]                    | 4000                                   |
| CRI                                       | >80                                    |
| SDCM (LED sources)                        | 3                                      |
| Beam angle [°]                            | (C0-C180) / (C90-C270) - 94,6° / 93,6° |
| Photobiological risk class (IEC/EN 62471) | RG0                                    |
| Protection against electric shock         | I                                      |
| Protection degree                         | IP65                                   |
| Voltage                                   | 220..240 V, 50..60 Hz                  |
| Lifetime of LED sources [h]               | 100000                                 |
| Lx/By                                     | L80/B10                                |
| Operating temperature range [°C]          | -40 ÷ 40                               |
| Driver                                    | standard on/off (E)                    |
| Circuit load capacity                     | 5 (B10), 9 (B16), 9 (C10), 15 (C16)    |

**Mechanical data**



|                  |                                   |
|------------------|-----------------------------------|
| Assembly         | surface mounted on slings         |
| Material         | aluminum                          |
| Color            | RAL 9005 (black)                  |
| Diffuser         | optical system based on PC lenses |
| Impact resistant | IK10                              |
| Weight [kg]      | 2,3                               |
| Dimensions [mm]  | Ø300 x 111                        |

**A graph of light**

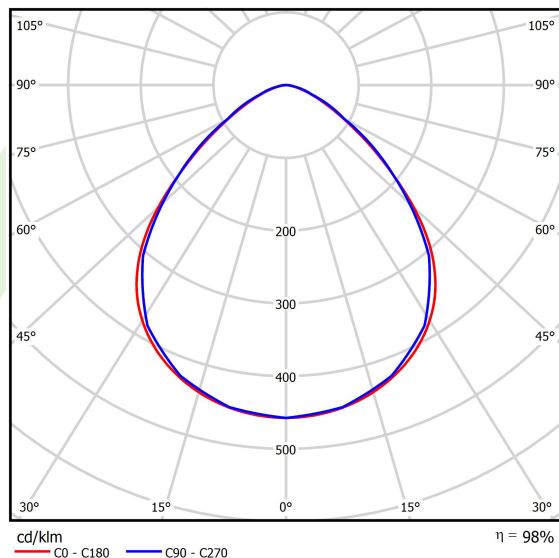

**Accessories**

Index 19.9909.0009.04

Name Bracket for ATENA LED PRO  
100W/150W/200W C Series LED  
High Bay

