

**Product:** ATENA LED PRO 30000 OPTICS-90 EDD IP65 04 840

**Index:** 19.4394.2223.04



## Description

Atena LED Pro is a solution for industrial spaces, combining efficiency of over 200 lm/W, durability, and adaptability. Its aerodynamic design enables passive cooling, while flexible mounting options and accessories like anti-glare systems and motion sensors enhance its versatility. Built to perform in tough conditions with temperatures from -40°C to +40°C, Atena LED Pro is reliable, efficient, and tailored for excellence.

## Product information


Category	Industrial luminaires
Family	ATENA LED PRO
Name	ATENA LED PRO 30000 OPTICS-90 EDD IP65 04 840
Index	19.4394.2223.04
EAN	5902107636210



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	30641,3
LED power [W]	139,7
Luminaire luminous flux [lm]	30028,5
Power of luminaire [W]	147,5
Luminaire's light efficiency [lm/W]	203,6
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 94,6° / 93,6°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	DIM DALI (EDD)
Circuit load capacity	5 (B10), 9 (B16), 9 (C10), 15 (C16)

**Mechanical data**



Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9005 (black)
Diffuser	optical system based on PC lenses
Impact resistant	IK10
Weight [kg]	2,3
Dimensions [mm]	Ø300 x 111

**A graph of light**

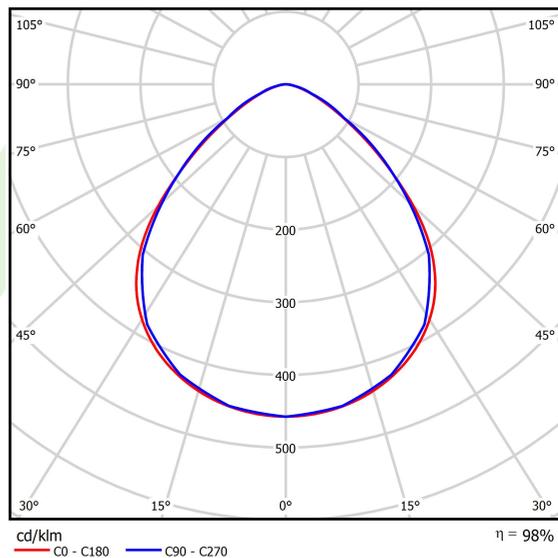

**Accessories**

Index 19.9909.0009.04

Name Bracket for ATENA LED PRO  
100W/150W/200W C Series LED  
High Bay

