

**Product:** ATENA LED PRO 40000 OPTICS-120 EDD IP65 04 840

**Index:** 19.4394.3323.04



## Description

Atena LED Pro is a solution for industrial spaces, combining efficiency of over 200 lm/W, durability, and adaptability. Its aerodynamic design enables passive cooling, while flexible mounting options and accessories like anti-glare systems and motion sensors enhance its versatility. Built to perform in tough conditions with temperatures from -40°C to +40°C, Atena LED Pro is reliable, efficient, and tailored for excellence.

## Product information


Category	Industrial luminaires
Family	ATENA LED PRO
Name	ATENA LED PRO 40000 OPTICS-120 EDD IP65 04 840
Index	19.4394.3323.04
EAN	5902107636258



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	40196,7
LED power [W]	184,2
Luminaire luminous flux [lm]	39392,7
Power of luminaire [W]	196
Luminaire's light efficiency [lm/W]	201
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) - 110,6°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	DIM DALI (EDD)
Circuit load capacity	3 (B10), 6 (B16), 6 (C10), 10 (C16)

**Mechanical data**



Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9005 (black)
Diffuser	optical system based on PC lenses
Impact resistant	IK10
Weight [kg]	2,9
Dimensions [mm]	Ø350 x 112

**A graph of light**

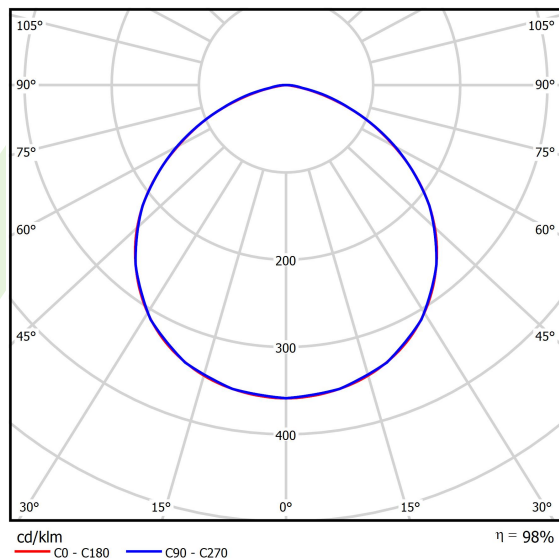

**Accessories**

Index 19.9909.0009.04  
 Name Bracket for ATENA LED PRO  
 100W/150W/200W C Series LED  
 High Bay

