

Product: LUXCAN PRO 4000 15° EDD 63 840 3F

Index: 19.4317.3123.63



## Description

Product for different applications. Various optics, based on lenses, provide a wide range of possibilities, from the narrow beam, indirect, to the wide beam. Available with the possibility of ordering a non-standard version. Cylindrical spotlight setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature optimised to be used as general & accent lighting for commercial areas shop-windows and different indoor spaces. Designed for Installation on the triphasic track. Body built in extruded aluminium painted with high quality coating.

## Product information


Category	Projectors
Family	LUXCAN PRO
Name	LUXCAN PRO 4000 15° EDD 63 840 3F
Index	19.4317.3123.63
EAN	5902107394486



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	4305
LED power [W]	22,7
Luminaire luminous flux [lm]	3265,3
Power of luminaire [W]	26,7
Luminaire's light efficiency [lm/W]	122,3
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 14,6° / 15,2°
Protection against electric shock	II
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	86000 (1) / 100000 (2)
Lx/By	L90/B10 (1) / L80/B10 (2)
Operating temperature range [°C]	5 ÷ 35
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	47 (B10), 76 (B16), 47 (C10), 76 (C16)

## Mechanical data



Assembly	mounted on a three-phase track
Material	aluminum
Color	RAL 9003 (white)
Diffuser	transparent PMMA
Impact resistant	IK04
Dimensions [mm]	Ø90 x 187

## A graph of light

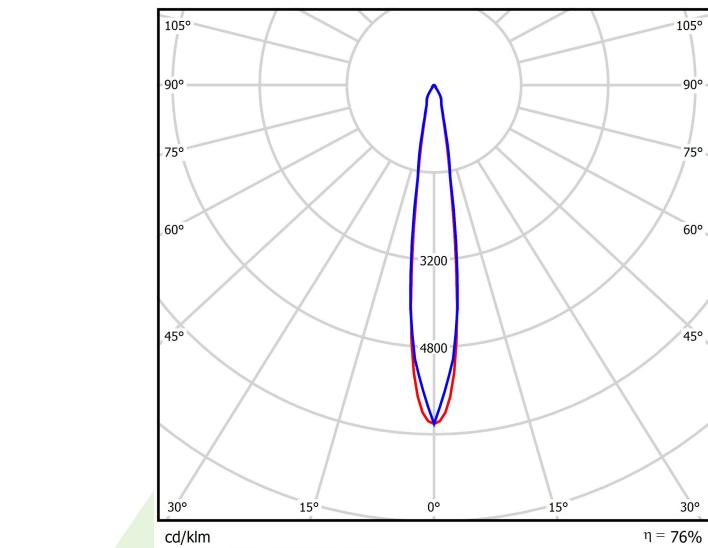

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026