


**Product:** ARIBAU SOUND ABSORBENT 2000 LOUVER DAISY-BLACK-WIDE/RED E 04 840 / 596X596MM 2R2/2X2

**Index:** 19.4334.1321.04

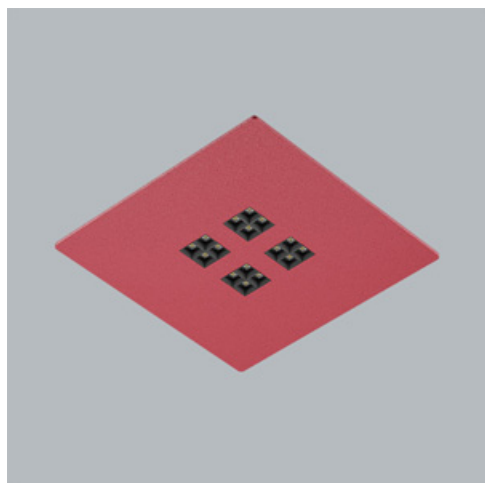

## Description

Aribau is a family of pendant, solo luminaires with the possibility of combining them into complex ceiling systems. The luminaire body is made of lacquered steel sheet in black. The optics are based on 7x1 and 4x4 louver systems with low glare. A distinctive feature of each luminaire is the lower bezel made of acoustic material. The acoustic panels are manufactured from PET felt, a significant proportion of which is recycled. The material is durable, lightweight, pleasant to the touch and produced in a wide range of colours (standard colours are red, blue and grey). Another advantage of this material is that it is flame retardant and has very good acoustic properties (sound attenuation). The dimensions of the square (596x596) and rectangular (1196x596 and 1196x596) luminaire covers create a wide range of interior design possibilities. The high aesthetics of the products make it possible to use the luminaires to illuminate prestigious interiors (hotels, offices, banks, theatres, cinemas, etc.). Another important application is the use of luminaires with acoustic panels wherever we want to silence unwanted sounds (interiors of offices, conference rooms, hotel rooms, etc.). It should be remembered that luminaires alone are not decisive for the soundproofing of a room, but they can be an important complement to soundproofing systems based on PET acoustic panels.

## Product information


|          |  |
|----------|--|
| Category | Surface mounted luminaires   |
| Family   | ARIBAU SOUND ABSORBENT   |
| Name     | ARIBAU SOUND ABSORBENT 2000 LOUVER DAISY-BLACK-WIDE/RED E 04 840 / 596X596MM 2R2/2X2 |
| Index    | 19.4334.1321.04  |



## Light and electrical data

|                                     |   |
|-------------------------------------|---|
| Light source                        | LED                                     |
| Luminous flux LED [lm]              | 2156                                    |
| LED power [W]                       | 10,8                                    |
| Luminaire luminous flux [lm]        | 1789                                    |
| Power of luminaire [W]              | 12,1                                    |
| Luminaire's light efficiency [lm/W] | 147,9                                   |
| Color of the light [K]              | 4000                                    |
| CRI                                 | >80                                     |
| SDCM (LED sources)                  | 3                                       |
| Beam angle [°]                      | (C0-C180) / (C90-C270) - 72,6° / 74,4°  |
| Protection against electric shock   | I                                       |
| Protection degree                   | IP40                                    |
| Voltage                             | 220..240 V, 50..60 Hz                   |
| Lifetime of LED sources [h]         | 72000                                   |
| Lx/By                               | L80/B10                                 |
| Operating temperature range [°C]    | 5 ÷ 35                                  |
| Driver                              | standard on/off (E)                     |
| Power factor cos φ                  | >0,95                                   |
| Circuit load capacity               | 46 (B10), 74 (B16), 72 (C10), 115 (C16) |

## Mechanical data

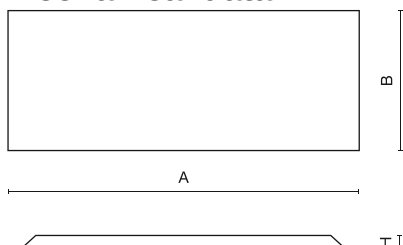

|                  |                            |
|------------------|----------------------------|
| Assembly         | surface mounted on slings  |
| Material         | steel sheet/PET            |
| Color            | RAL 9005 (black)/red       |
| Diffuser         | LOUVER (anti-glare louver) |
| Impact resistant | IK04                       |
| Dimensions [mm]  | 596 x 596 x 50             |

A graph of light



Accessories

Index 6E1-8670-B-1,5-3X  
Name SUSPENSION NEW TYPE-F  
LENGHT-1,5 METER WIRE 3X 1-  
POINT



Index 19.3272.1205.00  
Name SUSPENSION NEW TYPE-E  
LENGHT-1,5 METER WITHOUT  
WIRE 1-POINT



Index 3H-GST9103010531  
Name [C] WIELAND CONNECTOR  
GST15I3V 2P1T W SW  
91.030.1053.1 Distributor for  
Socket



Index 3H-GST9193130531  
Name [C] WIELAND CONNECTOR  
GST15I3S B1 ZR1W SW  
91.931.3053.1 Socket for cable



Index 2LAC11759-19005  
Name SIDE CONNECTOR 11759-1  
RAL9005



Index 2LAC11759-39005  
Name INNER CONNECTOR 11759-3  
RAL9005



Index 3E-3-15W-07MWGC  
Name 3x1,5x0,7m WELAND MALE-  
FEMALE GST15I3 BLACK  
SM05250



Index 3E-3-15W-13MWGC  
Name 3x1,5x1,3m WELAND MALE-  
FEMALE GST15I3 BLACK  
SM05250

