

Product: PAREO ONE LED 2000 AREA E IP66 22 740

Index: 19.4440.1181.22



Description

Modernistic park and garden luminaire. Body made of cast aluminium. Transparent diffuser made of hardened glass. External coating provides high level of resistance to all weather conditions and aesthetic appearance of the luminaire during the whole lifetime (IP66 rating). The diameter of the fitting is 78 mm. The luminaire is especially recommended for squares, parks, open spaces.

Product information


Category	Outdoor luminaires
Family	PAREO ONE LED
Name	PAREO ONE LED 2000 AREA E IP66 22 740
Index	19.4440.1181.22
EAN	5902107311827



Light and electrical data


Light source	LED
Luminous flux LED [lm]	2440
LED power [W]	10,8
Luminaire luminous flux [lm]	2006
Power of luminaire [W]	12,1
Luminaire's light efficiency [lm/W]	165,8
Color of the light [K]	4000
CRI	>70
Beam angle [°]	(C0-C180) / (C90-C270) - 118,2° / 112,4°
Protection against electric shock	II
Protection degree	IP66
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Power factor cos φ	>0,9
Circuit load capacity	15 (B10), 25 (B16), 25 (C10), 40 (C16)

Mechanical data

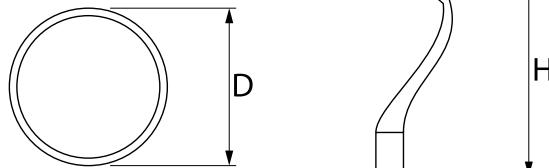

Assembly	mounted on poles
Material	aluminum
Color	RAL 9007 (dark grey)
Diffuser	hardened transparent glass
Impact resistant	IK09
Weight [kg]	5,55
Dimensions [mm]	Ø490 x 560

A graph of light

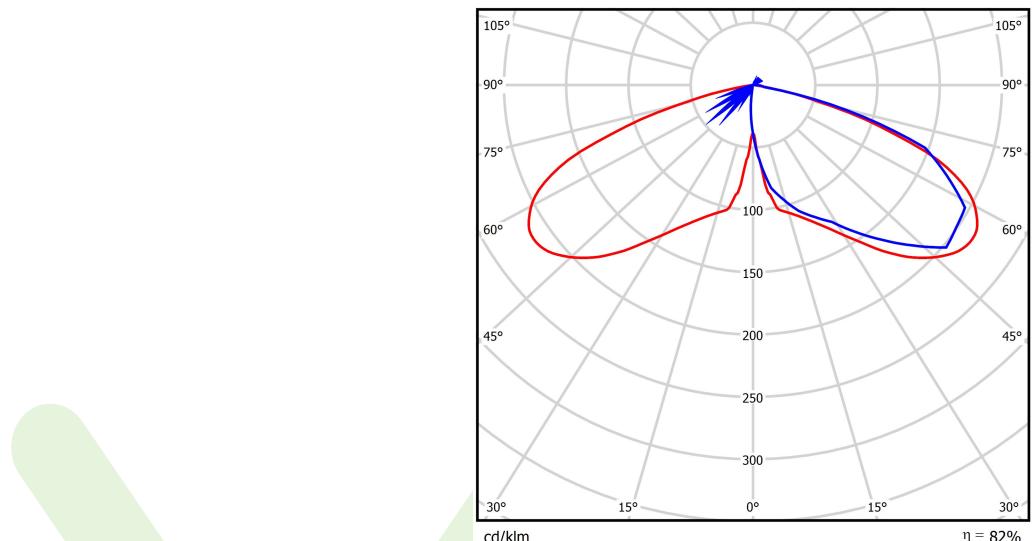

Accessories

Index 19.3266.9999.22

Name PAREO ONE LED REDUCTION 22
76/62mm

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 13-01-2026