

**Product:** PAREO ONE LED 2000 STREET-M E IP66 22 730

**Index:** 19.4440.2191.22



## Description

Modernistic park and garden luminaire. Body made of cast aluminium. Transparent diffuser made of hardened glass. External coating provides high level of resistance to all weather conditions and aesthetic appearance of the luminaire during the whole lifetime (IP66 rating). The diameter of the fitting is 78 mm. The luminaire is especially recommended for squares, parks, open spaces.

## Product information



|          |                                           |
|----------|-------------------------------------------|
| Category | Outdoor luminaires                        |
| Family   | PAREO ONE LED                             |
| Name     | PAREO ONE LED 2000 STREET-M E IP66 22 730 |
| Index    | 19.4440.2191.22                           |
| EAN      | 5902107312503                             |



## Light and electrical data


|                                     |                                        |
|-------------------------------------|----------------------------------------|
| Light source                        | LED                                    |
| Luminous flux LED [lm]              | 2409                                   |
| LED power [W]                       | 10,8                                   |
| Luminaire luminous flux [lm]        | 1982                                   |
| Power of luminaire [W]              | 12,1                                   |
| Luminaire's light efficiency [lm/W] | 163,8                                  |
| Color of the light [K]              | 3000                                   |
| CRI                                 | >70                                    |
| Beam angle [°]                      | street light distribution              |
| Protection against electric shock   | II                                     |
| Protection degree                   | IP66                                   |
| Voltage                             | 220..240 V, 50..60 Hz                  |
| Lifetime of LED sources [h]         | 100000                                 |
| Lx/By                               | L80/B10                                |
| Operating temperature range [°C]    | -40 ÷ 40                               |
| Driver                              | standard on/off (E)                    |
| Power factor cos φ                  | >0,9                                   |
| Circuit load capacity               | 15 (B10), 25 (B16), 25 (C10), 40 (C16) |

**Mechanical data**



|                  |                            |
|------------------|----------------------------|
| Assembly         | mounted on poles           |
| Material         | aluminum                   |
| Color            | RAL 9007 (dark grey)       |
| Diffuser         | hardened transparent glass |
| Impact resistant | IK09                       |
| Weight [kg]      | 5,55                       |
| Dimensions [mm]  | Ø490 x 560                 |

**A graph of light**

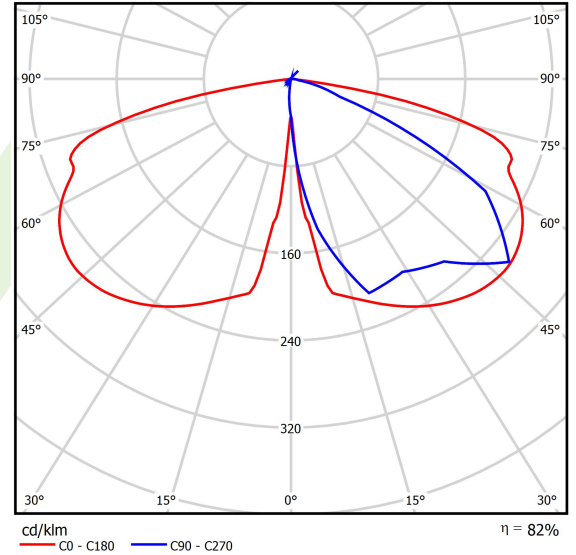

**Accessories**

Index 91.4440.0009.22  
Name PAREO ONE LED REDUCTION 22  
76/62MM

