

Product: STREETPARK SMALL V2 LED PREMIUM 7700 STREET-ZEBRA-CROSSING-P E IP66 43 740

Index: 19.4402.5781.43



## Description

Streetpark LED Mini/Small combines elegance and efficiency, offering optimal lighting for urban streets, roads, and public spaces. With up to 182 (Mini), 187 (Small) lm/W efficiency, and a lumen output of up to 7523 lm (Mini) and 17287 lm (Small), it ensures excellent visibility while reducing energy consumption. Built to withstand harsh outdoor conditions, it's perfect for a wide range of applications, from main roads to squares. The diameter of the mounting bracket is 60 mm.

## Product information

Category	Outdoor luminaires
Family	STREETPARK SMALL V2 LED PREMIUM
Name	STREETPARK SMALL V2 LED PREMIUM 7700 STREET-ZEBRA-CROSSING-P E IP66 43 740
Index	19.4402.5781.43
EAN	5902107645700



## Light and electrical data

Light source	LED
Luminous flux LED [lm]	8037,8
LED power [W]	41,3
Luminaire luminous flux [lm]	7507,3
Power of luminaire [W]	45,3
Luminaire's light efficiency [lm/W]	165,7
Color of the light [K]	4000
CRI	>70
SDCM (LED sources)	3
Beam angle [°]	street light distribution
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP66
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	108000
Lx/By	L95/B10
Operating temperature range [°C]	-40 ÷ 50
Driver	standard on/off (E)
Circuit load capacity	8 (B10), 13 (B16), 13 (C10), 22 (C16)


## Mechanical data



Assembly	mounted on poles
Material	aluminum
Color	RAL 7035 (light grey)
Diffuser	PMMA lenses and hardened transparent glass
Impact resistant	IK09
Dimensions [mm]	610 x 205 x 85

A

## A graph of light

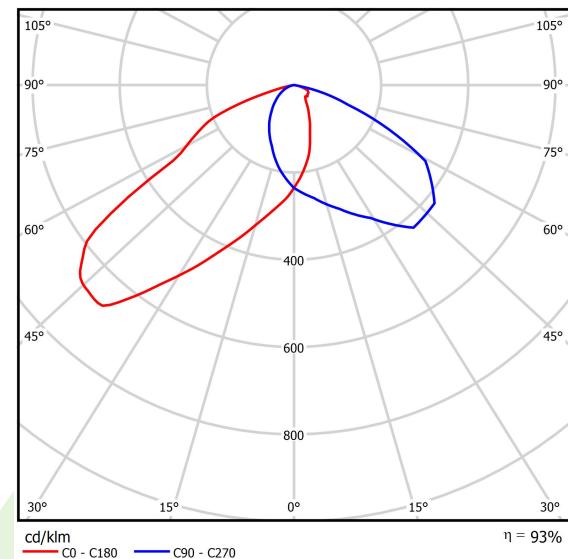

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-01-2026