## Product: KUBIK IN NEW LED P 6X1,7W PC-T E IP65 34 830 / 270X130MM Index: 19.4409.2611.34




## Description

KUBIK IN LED is a high-performance outdoor luminaire designed to highlight building facades with aesthetic accent lighting. It is also ideal for illuminating entrances to underground garages and for lighting walkways and passageways, surrounded by a wall. The new updated version features a simplified, fully aluminum body that improves durability and luminaire tightness, maintaining an IP65 rating for excellent protection against dust and water, and ensuring reliable performance in outdoor conditions. The magnetic mounting system allows for easy, secure installation, reducing setup time. Luminaire offers the same highquality optics from previous versions, ensuring consistent light output and asymmetric light distribution. The transparent polycarbonate diffuser provides even illumination while protecting against mechanical damage. KUBIK IN LED offers improved design, and enhanced resistance combined with easier and faster installation.


(C16)

Product information		Category Outdoor luminaires	
		Family KUBIK IN NEW LED	
		Name KUBIK IN NEW LED P 6X1,7W PC-T E IP65 34 830 / 270X130N	ЛМ
		Index 19.4409.2611.34	
		EAN 5902107668839	
			Ŵ
Light and electrical data		Light source LED	
		Luminous flux LED [Im] 828	
		LED power [W] 10,2	
		Luminaire luminous flux [Im] 662	
		Power of luminaire [W] 12,8	
		Luminaire's light efficiency [lm/W] 51,7	
		Color of the light [K] 3000	
		CRI >80	
		SDCM (LED sources) 5	
		Beam angle [°] 100°+55°	
		Photobiological risk class (IEC/EN RG0 62471)	
		Protection against electric shock I	
		Protection degree IP65	
		Voltage 220240 V, 5060 Hz	
		Lifetime of LED sources [h] 100000	
		Lx/By <b>L80/B10</b>	
		Operating temperature range [°C] -25 ÷ 30	
		Driver standard on/off (E)	
		Power factor cos φ >0,5	
		Circuit load capacity <b>31 (B10)</b> , <b>50 (B16)</b> , <b>50 (C10)</b> , <b>80</b>	)



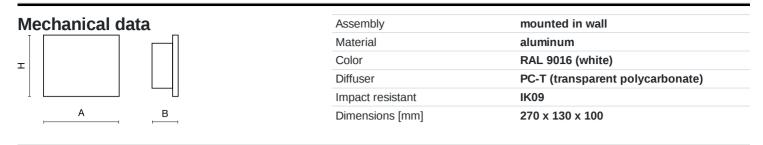

## A graph of light

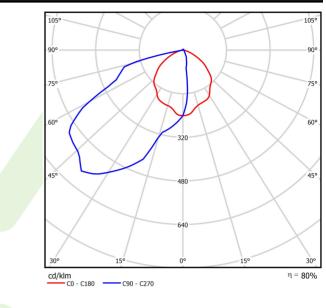

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 22-08-2025