


Product: KUBIK IN NEW LED P 8X1,7W PC-T E IP65 25 830 / 270X130MM

Index: 19.4409.2811.25

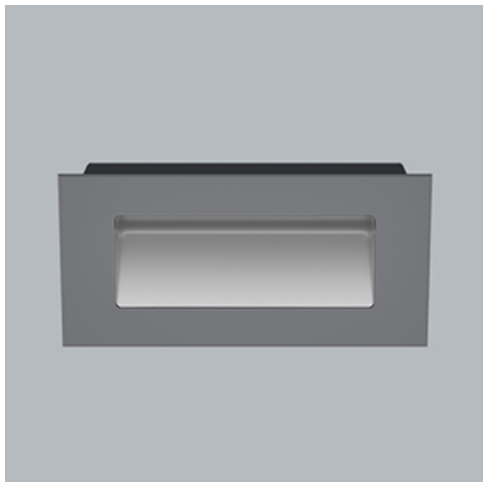

Description

An outdoor fitting made for illuminating building facades and creating lighting effects. Mounting in the wall using assembly box included in the set. The body is made of aluminum painted with special facade paint which is resistant to bad weather conditions. Energy-efficient fitting made of component parts produced by renowned companies. It is possible to use various LED colours at the request of a customer. Ergonomic shapes of the fitting enable the application of the Kubik IN LED type fitting almost in every building. The assembly is very easy. The fitting is featured by a high level of protection against the penetration of solids and water: IP65, which renders the fitting an interesting decorative solution highlighting the architecture of an illuminated building.

Product information


Category	Outdoor luminaires
Family	KUBIK IN NEW LED
Name	KUBIK IN NEW LED P 8X1,7W PC-T E IP65 25 830 / 270X130MM
Index	19.4409.2811.25



Light and electrical data

Light source	LED
Luminous flux LED [lm]	1104
LED power [W]	13,6
Luminaire luminous flux [lm]	883
Power of luminaire [W]	17
Luminaire's light efficiency [lm/W]	51,9
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	5
Beam angle [°]	100°+55°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,5
Circuit load capacity	31 (B10), 50 (B16), 50 (C10), 80 (C16)

Mechanical data



Assembly	mounted in wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure)
Diffuser	transparent polycarbonate
Impact resistant	IK09
Dimensions [mm]	270 x 130 x 100

A graph of light

