

**Product:** X-LINE PRO COMPACT 2000 MICRO-PRM EDD 04 840 / L-572MM

**Index:** 19.4436.2123.04



## Description

Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct (down) light distribution. Available optical systems: PMMA opal diffuser (PLX), microprismatic PMMA (Micro-PRM). The luminaire is available in a single version. Available colors: anodized aluminum, black RAL 9005, white RAL 9016 or any color from the RAL palette on request. Gray, white or black polycarbonate end caps. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover and increase the IP rating to IP40. The use of luminaires typically for offices, public utility rooms, communication / common areas in multi-family buildings. There is the possibility of fitting a luminaire with a sound-absorbing housing.

## Product information

|          |   |
|----------|---|
| Category | <b>Compact</b>  |
| Family   | <b>X-LINE PRO COMPACT</b>                                     |
| Name     | <b>X-LINE PRO COMPACT 2000 MICRO-PRM EDD 04 840 / L-572MM</b> |
| Index    | <b>19.4436.2123.04</b>  |
| EAN      | <b>5902107522056</b>  |



## Light and electrical data


|   |   |
|---|---|
| Light source                              | <b>LED</b>                                    |
| Luminous flux LED [lm]                    | <b>2229,3</b>                                 |
| LED power [W]                             | <b>11,1</b>                                   |
| Luminaire luminous flux [lm]              | <b>1500,3</b>                                 |
| Power of luminaire [W]                    | <b>13,1</b>                                   |
| Luminaire's light efficiency [lm/W]       | <b>114,5</b>                                  |
| Color of the light [K]                    | <b>4000</b>                                   |
| CRI                                       | <b>&gt;80</b>                                 |
| SDCM (LED sources)                        | <b>3</b>                                      |
| Beam angle [°]                            | <b>(C0-C180) / (C90-C270) - 79,4° / 87,8°</b> |
| Photobiological risk class (IEC/EN 62471) | <b>RG0</b>                                    |
| Protection against electric shock         | <b>I</b>                                      |
| Protection degree                         | <b>IP40</b>                                   |
| Voltage                                   | <b>220..240 V, 50..60 Hz</b>                  |
| Lifetime of LED sources [h]               | <b>90000</b>                                  |
| Lx/By                                     | <b>L80/B10</b>                                |
| Operating temperature range [°C]          | <b>5 ÷ 35</b>                                 |
| Driver                                    | <b>DIM DALI (EDD)</b>                         |
| Power factor cos φ                        | <b>&gt;0,95</b>                               |
| Circuit load capacity                     | <b>20 (B10), 31 (B16), 33 (C10), 53 (C16)</b> |

**Mechanical data**



|                  |   |
|------------------|---|
| Assembly         | directly mounted to ceiling construction or surface mounted on slings using accessories |
| Material         | aluminum  |
| Color            | RAL 9005 (black)  |
| Diffuser         | Micro-PRM (micro-prismatic diffuser PMMA)   |
| Impact resistant | IK04  |
| Dimensions [mm]  | 572 x 60 x 72   |

**A graph of light**

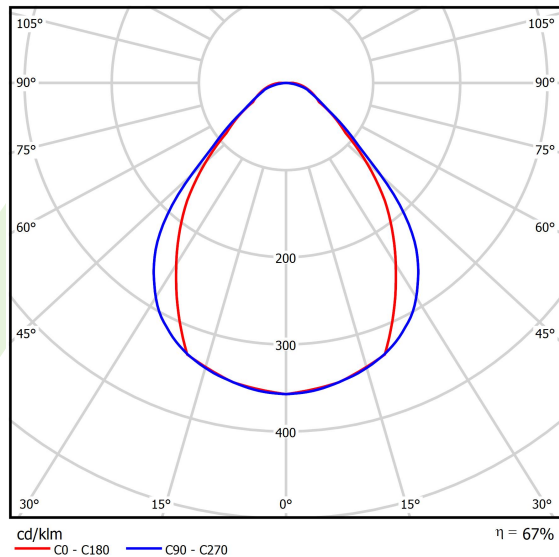

## Accessories

Index 6E1-500KW041P-5

Name SUSPENSION NEW TYPE-A 04  
LENGHT 1,5M WIRE 5X 1-POINT



Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E  
LENGHT-1,5 METER WITHOUT  
WIRE 1-POINT



Index 19.2117.0007.04

Name X-LINE PRO COMPACT L-DOWN  
SURFACE BRACKET SET 04



Index 19.2117.0001.00

Name X-LINE PRO SOUND  
ABSORBENT L-572MM RED



Index 19.2117.0002.00

Name X-LINE PRO SOUND  
ABSORBENT L-572MM BLUE



Index 19.2117.0003.00

Name X-LINE PRO SOUND  
ABSORBENT L-572MM GREY

