




ARTSHAPE LINE LED

Architectural luminaires

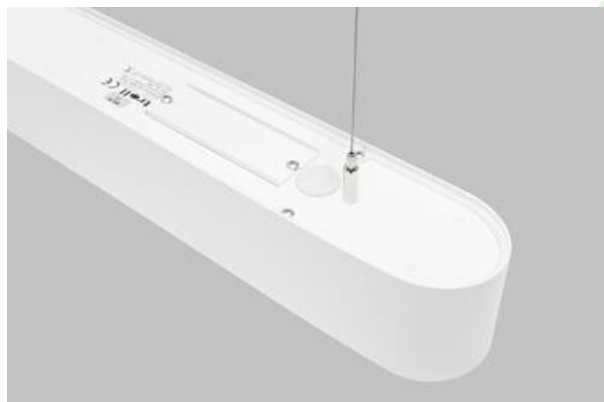

Modernistic architectural luminaire in shapes of popular geometrical figures and fashionable design of simple form. The luminaire is adjusted to be mounted on slings. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminaire is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres.






Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
ARTSHAPE LINE SMALL 1000	990	8	4000	560 x 80 x 80
ARTSHAPE LINE SMALL 2000	1980	16	4000	560 x 80 x 80
ARTSHAPE LINE MEDIUM 2000	1980	16	4000	1100 x 80 x 80
ARTSHAPE LINE MEDIUM 4000	3960	32	4000	1100 x 80 x 80
ARTSHAPE LINE LARGE 3000	2970	25	4000	1640 x 80 x 80
ARTSHAPE LINE LARGE 6000	5940	50	4000	1640 x 80 x 80
ARTSHAPE LINE MEDIUM TW 3000	2760	27	2700 ÷ 6500	1100 x 80 x 80
ARTSHAPE LINE LARGE TW 4000	4080	39	2700 ÷ 6500	1640 x 80 x 80
ARTSHAPE LINE MEDIUM UP&DOWN 3700/4000	3344/3960	60	4000	1100 x 80 x 80
ARTSHAPE LINE LARGE UP&DOWN 4800/6000	5016/5940	95	4000	1640 x 80 x 80

Technical drawing:

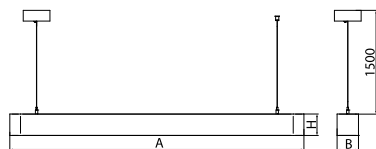

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000/35000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3/4
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	0 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)


Additional information:

These luminaires are characterised by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation. Temperature range for storage and transport from 0° C to 40° C. The luminaire can be made in CLO version.


Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-01-2023

Dodatkowe informacje / Additional information / Zusätzliche Informationen:


Artshape EDGE

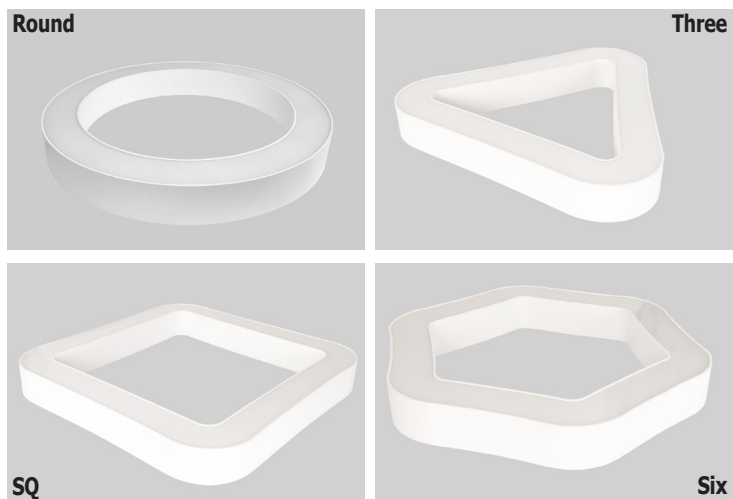


Artshape FULL

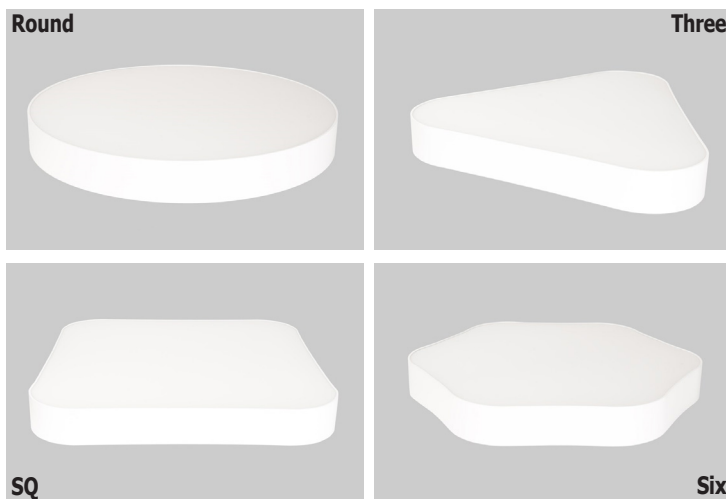

Artshape Up & Down (Round / Three / SQ / Six / Line)

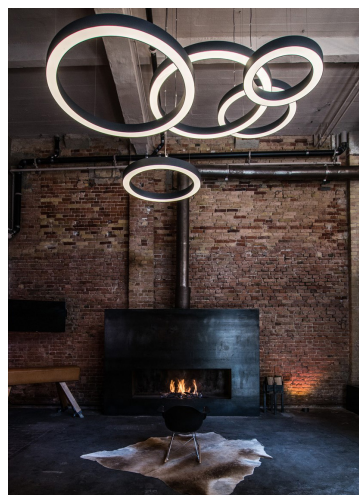

Artshape TW (Tunable white)
(Round / Three / Sq / Six / Line)

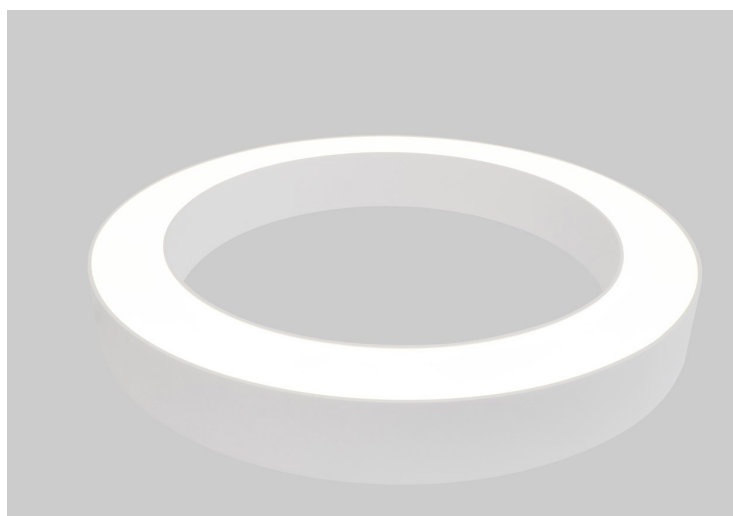

Artshape RGB
(Round Edge / Three Edge / Sq Edge / Six Edge)



2700 ÷ 6500 K