





#### **KUBIK 1D LED**

#### **Outdoor luminaires**







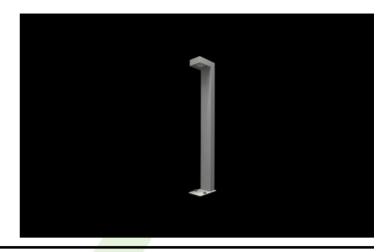

Outdoor luminaire to be mounted on dedicated. The product is equipped with the newest generation of highly efficient LED light sources. LED module is additionally sealed with a special lens which at the same time ensures optimal wide light distribution. The housing is resistant to corrosion and is made of aluminum lacquered with facade paint. The product is dedicated for decorative illumination of walking paths, parks, recreational areas, residential ares, gardens and allotment gardens. The level of protection against solid substances, dust and moisture penetration is: IP65.















### Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK 1D LED 1800 L-900	2268 / 1800	12,5 / 14	4000	152 x 120 x 900

## **Technical drawing:**



## Light and electrical features:

Light source			
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	83000 (1) / 100000 (2) / 100000 (3)/100000		
Lx/By	L90/B10 (1) / L80/B10 (2) / L70/B10 (3)/L80/B10		
CRI	>80		
SDCM (LED sources)	2		
Operating temperature range [°C]	-25 ÷ 50		
Driver	standard on/off (E)		
Power factor cos φ	>0,95		

<sup>\*</sup> Variant to specify when ordering

## **Mechanical features:**

Assembly	for the ground
Material	aluminum
Color	RAL 9006 (gray, metallic, fine structure) RAL 7016 (anthracite, metallic, fine structure) *
Diffuser	none



# Dodatkowe informacje / Additional information / Zusätzliche Informationen:

Wersja "T" – na zapytanie / "T" version – for request / "T" Ausführung – nach Sonderwunsch

