




KUBIK WALL ECO LED IP20

Architectural luminaires

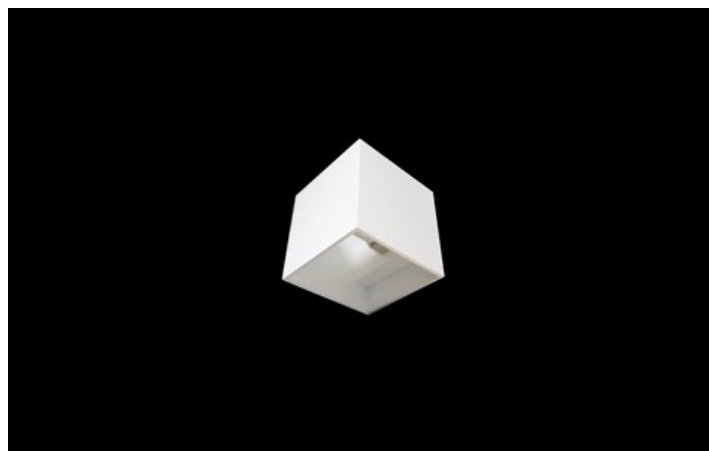


Luminaire for interchangeable LED sources (called retrofit) with a G9 base. The body is made of aluminum. The open design provides very easy access to the source and its replacement, and very easy mounting on the wall as well. Simple construction giving an interesting light effect. Recommended for decorative lighting of passages, corridors or staircases.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK WALL ECO LED UP&DOWN IP20	depending on applied light source	depending on applied light source	depending on applied light source	120 x 120 x 120

Technical drawing:



Light and electrical features:

Light source	RETROFIT G9 (not included)
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	depending on applied light source
Lx/By	depending on applied light source
CRI	depending on applied light source
SDCM (LED sources)	depending on applied light source
Operating temperature range [°C]	
Driver	none

* Variant to specify when ordering

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	RAL 9005 (black) RAL 9016 (white) *
Diffuser	none

Additional information:

LED light source maximum diameter - 18 mm.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-01-2023