



## **PAREO ONE LED**

### **Outdoor luminaires**




Modernistic park and garden luminaire. Body made of cast aluminium. Transparent diffuser made of hardened glass. External coating provides high level of resistance to all weather conditions and aesthetic appearance of the luminaire during the whole lifetime (IP66 rating). The diameter of the fitting is 78 mm. The luminaire is especially recommended for squares, parks, open spaces.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
PAREO ONE LED 2000	2409 / 2440	12,1	3000 / 4000	Ø490 x 560
PAREO ONE LED 3000	3324 / 3392	18,1	3000 / 4000	Ø490 x 560
PAREO ONE LED 4000	4523 / 4615	26	3000 / 4000	Ø490 x 560
PAREO ONE LED 6000	6418 / 6549	40,5	3000 / 4000	Ø490 x 560

## Technical drawing:

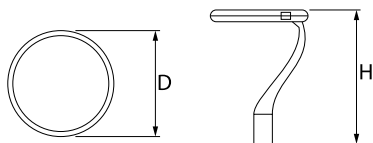

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>70
SDCM (LED sources)	
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Power factor cos φ	>0,9

## Mechanical features:

Assembly	mounted on poles
Material	aluminum
Color	RAL 9007 (dark gray)
Diffuser	hardened transparent glass

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-01-2023