




## RING SURFACE LED

### Surface mounted luminaires

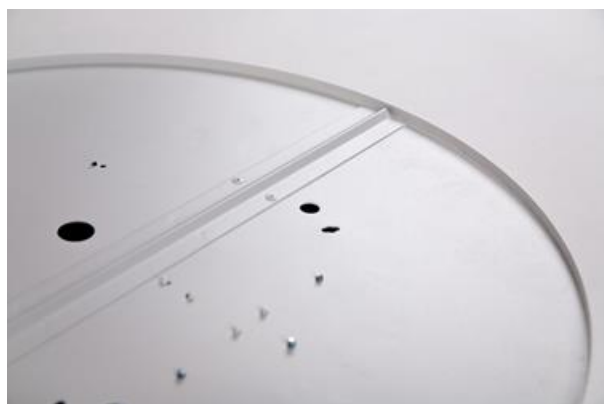

Sophisticated luminaire providing the effect of a lighting ring dedicated to be mounted on ceilings, equipped with highly efficient LED sources. The luminaire provides possibility for unique illumination of interior. The color rendering indicator is  $Ra > 80$ . Luminaire body is made from powder coated steel sheet in white. The luminaire diffuser is made from opal PMMA. Luminaire is protected against water and dust penetration – IP40. It has the first class protection against the electric shock.




"Artystyczny Żoliborz" residential, Warsaw



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
RING SURFACE 460 LED 6800	6578 / 6808	56	3000 / 4000	Ø460 x 70

Technical drawing:

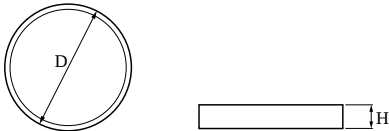

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	36000
Lx/By	L70/B50
CRI	>80
SDCM (LED sources)	
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

\* Variant to specify when ordering

Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	steel sheet
Color	RAL 9010 (white) RAL 9016 (white) *
Diffuser	PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-01-2023