




X-LINE LED CONNECTOR X

Surface mounted luminaires

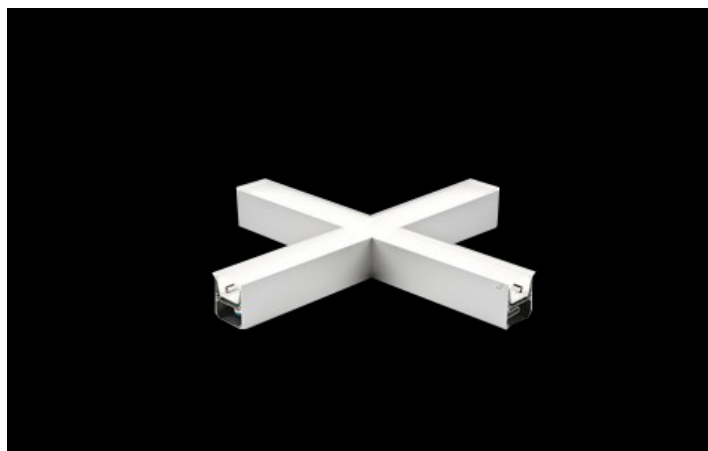


Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver. X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaires are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-----------------|------------------------|------------------------|-------------|---------------------------|
| X-LINE LED 5200 | 5051 / 5234 | 28,2 | 3000 / 4000 | 1126 x 1126 x 71 |
| X-LINE LED 8800 | 8811 / 9130 | 49,1 | 3000 / 4000 | 1126 x 1126 x 71 |

Technical drawing:



Light and electrical features:

| | |
|----------------------------------|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 (1) / 147000 (2) |
| Lx/By | L80/B10 (1) / L70/B50 (2) |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:



| | |
|----------|--|
| Assembly | directly mounted to ceiling construction or surface mounted on slings |
| Material | aluminum |
| Color | anodised aluminum |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal) |

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-01-2023

Dodatkowe informacje / Additional information:

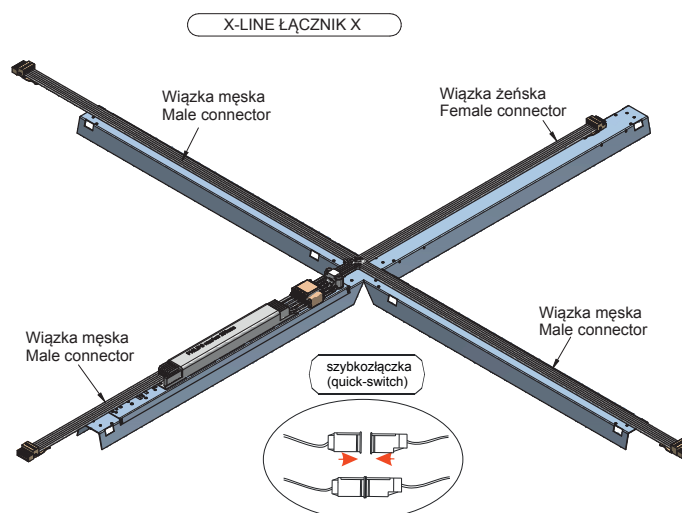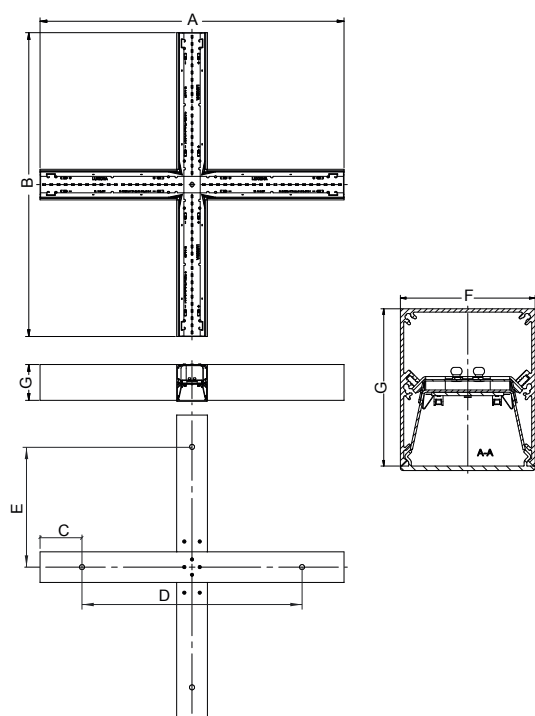

| | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) |
|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 5200 | 1126 | 1126 | 80 | 966 | 483 | 60 | 70 |
| 8800 | 1126 | 1126 | 80 | 966 | 483 | 60 | 70 |