



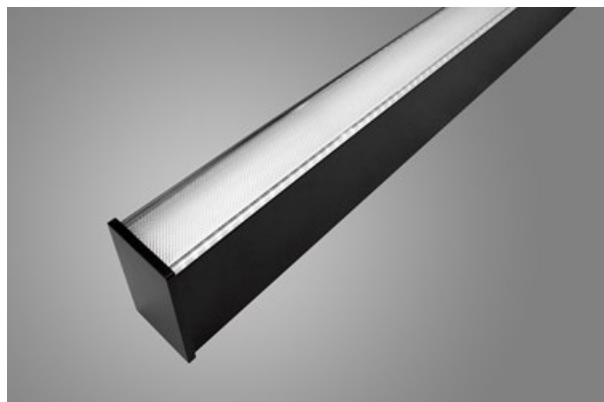

## X-LINE SLIM SURFACE LED COMPACT

### Compact

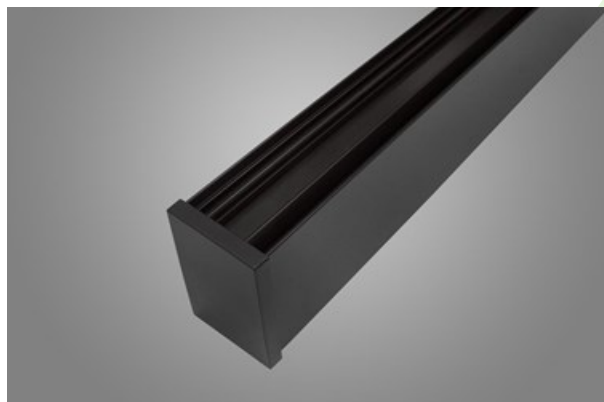

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED Compact, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim Compact uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim Compact luminaire is designed for mounting directly to ceiling.





Port Praski - Okrzei 6-8 street, Warsaw



## Main parameters:

| Name                                 | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm]       |
|--------------------------------------|------------------------|------------------------|-----------|---------------------------------|
| X-LINE SLIM SURFACE LED COMPACT 4000 | 4355 / 4606            | 26                     | 4000      | 1138 x 48 x 70 / 1418 x 48 x 70 |
| X-LINE SLIM SURFACE LED COMPACT 6000 | 6240                   | 43                     | 4000      | 1418 x 48 x 70                  |

## Technical drawing:

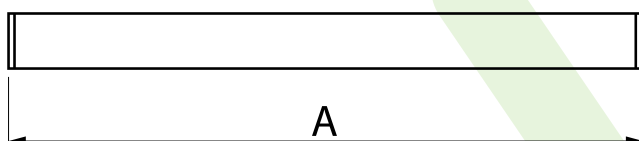

## Light and electrical features:

|                                  |                       |
|----------------------------------|-----------------------|
| Light source                     | LED                   |
| Voltage                          | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h]      | 60000                 |
| Lx/By                            | L80/B10               |
| CRI                              | >80                   |
| SDCM (LED sources)               | 3                     |
| Operating temperature range [°C] | 5 ÷ 30                |
| Driver                           | standard on/off (E)   |
| Power factor cos φ               | >0,95                 |

\* Variant to specify when ordering

## Mechanical features:

|          |  |
|----------|--|
| Assembly | surface mounted on ceiling                                   |
| Material | aluminum   |
| Color    | anodised aluminum<br>RAL 9005 (black)<br>RAL 9016 (white) *  |
| Diffuser | Micro-PRM (micro-prismatic diffuser PMMA)<br>PLX (PMMA opal) |

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-01-2023