

Product: ONLINE LED 4400 PLX E 24 840 / L-572MM Index: 19.3090.0004.24



Description


Luminary to be mounted on suspensions , or directly on solid ceiling construction. The suspended version is equipped with 1500 mm long suspension system that includes smooth regulation of the suspension length. Its body made from anodized aluminum profile. Luminary is equipped with highly efficient LED sources. Its diffuser is made from white polymethyl methacrylate with a light transparency more than 70%. Optical system creates Lambert diffuse reflection. No frame diffuser is equipped with specially formed latches that match the aluminum profile. Luminary is resistant to solids, dust, and humidity penetration – IP20.

Luminous flux LED [lm] 4565 LED power [M] 23,4 Luminaire luminous flux [lm] 3602 Power of luminaire [M] 24,7 Luminaire's light efficiency [lm/W] 145,8 Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (Co-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16)	Product information	Category	Surface mounte	d luminaires
Index 19.3090.0004.24 Image: Construction of the second secon		Family	ONLINE LED	
Light and electrical data Light and electrical data Light source LED Luminous flux LED [lm] 4565 LED power [M] 23,4 Luminaire luminous flux [lm] 3602 Power of luminaire [M] 24,7 Luminaire's light efficiency [lm/M] 145,8 Color of luminaire [M] 24,7 Luminaire's light efficiency [lm/M] 145,8 Color CRI 880 SDCM (LED sources) 3 Beam angle [°] (Co-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 + 30 Driver standard on/off (E) Power factor cos φ 50,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data A A A A A A A A A A A A A A A A A A		Name	ONLINE LED 4400 PLX E 24 840 / L-572MM	
Light and electrical data Light source Luminous flux LED [Im] 4565 LED power (M) 23,4 Luminaire luminous flux [Im] 3602 Power of luminaire (M) 24,7 Luminaire's light efficiency [Im/M) 145,8 Color of the light [K] 4000 CRI SDCM (LED sources) 3 Beam angle [^] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection against electric shock I Protection against electric shock I Protection against electric shock Lifetime of LED sources [h] 100000 (1) / 147000 (2) LX/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] Standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data A A A A A A A A A A A A A A A A A A		Index	19.3090.0004.24	
Luminous flux LED [lm] 4565 LED power [M] 23,4 Luminaire luminous flux [lm] 3602 Power of luminaire [luminous flux [lm] 3602 Power of luminaire is light efficiency [lm/M] 145,8 Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock 1 Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) L/KP L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 + 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16)				
Luminous flux LED [lm] 4565 LED power [M] 23,4 Luminaire luminous flux [lm] 3602 Power of luminaire [luminous flux [lm] 3602 Power of luminaire is light efficiency [lm/M] 145,8 Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock 1 Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) L/KP L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 + 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16)	Light and electrical data	Light source		LED
Luminaire luminous flux [lm] 3602 Power of luminaire [W] 24,7 Luminaire's light efficiency [lm/W] 145,8 Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (Co-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection degree IP20 Voltage 220.240 V, 50.60 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly direct mounted to ceiling construction or surface mounted on slings Material aluminum Color anodised aluminum Diffuser PLX (PMMA opal) Diffuser		Luminous flux	LED [lm]	4565
Power of luminaire [W] 24,7 Luminaire's light efficiency [lm/W] 145,8 Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (Co-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 + 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 0 (B10), 48 (B16), 43 (C10), 70 (C16) Material aluminum Color anodised aluminum Color anodised aluminum Difuser PLX (PMMA opal)		LED power [V	V]	23,4
Luminaire's light efficiency [lm/W] 145,8 Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16)		Luminaire lum	ninous flux [lm]	3602
Color of the light [K] 4000 CRI >80 SDCM (LED sources) 3 Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16)		Power of lumi	naire [W]	24,7
CRI >80 SDCM (LED sources) 3 Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection against electric shock I Protection degree IP20 Voltage 220.240 V, 50.60 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos ϕ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data A B A B		Luminaire's lig	ght efficiency [lm/W	/] 145,8
SDCM (LED sources) 3 Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data A B Assembly directly mounted to ceiling construction or surface mounted on slings Material aluminum Color anodised aluminum Diffuser PLX (PMMA opal)		Color of the lig	ght [K]	4000
Beam angle [°] (C0-C180) / (C90-C270) - 93,8° / 96,6° Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A B Diffuser PLX (PMIMA opal)		CRI		>80
Protection against electric shock I Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A B Assembly directial aluminum Color anodised aluminum Diffuser PLX (PIMMA opal)		SDCM (LED s	sources)	3
Protection degree IP20 Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A B Assembly aluminum Color anodised aluminum Color anodised aluminum Diffuser PLX (PMMA opal)		Beam angle [°]	(C0-C180) / (C90-C270) - 93,8° / 96,6°
Voltage 220240 V, 5060 Hz Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings Material aluminum Color anodised aluminum Color anodised aluminum Diffuser PLX (PMMA opal)		Protection aga	ainst electric shock	: I
Lifetime of LED sources [h] 100000 (1) / 147000 (2) Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A B B Material aluminum Color anodised aluminum Diffuser PLX (PMMA opal)		Protection de	gree	IP20
Lx/By L80/B10 (1) / L70/B50 (2) Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly A B Material A Color anodised aluminum Color anodised aluminum Diffuser PLX (PMMA opal)		Voltage		220240 V, 5060 Hz
Operating temperature range [°C] 5 ÷ 30 Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A B Material aluminum Color anodised aluminum Diffuser Diffuser PLX (PMMA opal) PLX (PMMA opal)		Lifetime of LE	D sources [h]	100000 (1) / 147000 (2)
Driver standard on/off (E) Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly A B A B A B		Lx/By		L80/B10 (1) / L70/B50 (2)
Power factor cos φ >0,95 Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A B Material aluminum Color anodised aluminum Diffuser PLX (PMMA opal)		Operating ten	nperature range [°0	C] 5 ÷ 30
Circuit load capacity 30 (B10), 48 (B16), 43 (C10), 70 (C16) Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A A Material aluminum Color anodised aluminum Diffuser PLX (PMMA opal)				standard on/off (E)
Mechanical data Assembly directly mounted to ceiling construction or surface mounted on slings A A Material aluminum Color anodised aluminum Diffuser PLX (PMMA opal)			· · ·	
A Material aluminum B Offuser PLX (PMMA opal)		Circuit load ca	apacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)
A B B A Aterial aluminum Color anodised aluminum Diffuser PLX (PMMA opal)	Mechanical data	Assembly	di su	rectly mounted to ceiling construction or Irface mounted on slings
Color anodised aluminum Diffuser PLX (PMMA opal)		Material	alı	uminum
		Color	an	odised aluminum
Impact resistant IK04		Diffuser	PL	-X (PMMA opal)
		Impact resista	ant IK	04

Dimensions [mm]

572 x 92 x 86

A graph of light

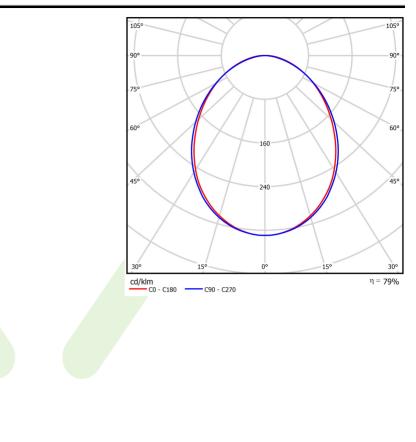





Accessories

- Index 6E1-500KWANK-3
- Name SUSPENSION NEW TYPE-A+B 24 LENGHT 1,5M WIRE 3X SET



- Index 6E1-9875-4-1,5-3X
- Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT








Name SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT



- Index 6E1-8670-B-1,5
- Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



- Index 6E1-500KWB24K-3
- Name SUSPENSION NEW TYPE-A+E 24 LENGHT 1,5M WIRE 3X SET

