

Product: UPDOOR 1500 LED SHM E IP65 34 840

Index: 19.3136.0001.34



Description

Powder painted steel housing. Possibility of mounting emergency module. Isolated battery applied in luminaire is equipped with thermostat enabling performance in low temperature up to -20°C . UPDOOR might be mounted on walls or ceilings and is recommended to illuminate buildings' entrances, arteries, tunnels, underground entrances, etc.

Product information

Category	Outdoor luminaires
Family	UPDOOR LED
Name	UPDOOR 1500 LED SHM E IP65 34 840
Index	19.3136.0001.34




Light and electrical data


Light source	LED
Luminous flux LED [lm]	1485
LED power [W]	9
Luminaire luminous flux [lm]	1195
Power of luminaire [W]	10
Luminaire's light efficiency [lm/W]	119,5
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	asymmetric light distribution - $\text{Imax}=-45^{\circ}$
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L70/B50
Operating temperature range [°C]	$-20 \div 30$
Driver	standard on/off (E)
Power factor $\cos \varphi$	>0,95
Circuit load capacity	61 (B10), 98 (B16), 102 (C10), 164 (C16)

Mechanical data

Assembly	mounted on wall
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	SHM (hardened mat glass)
Impact resistant	IK10
Weight [kg]	3
Dimensions [mm]	242 x 266 x 154

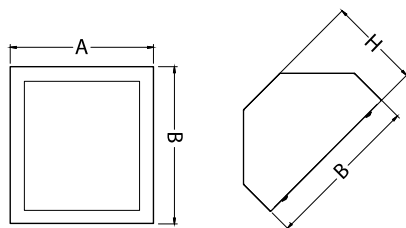

A graph of light

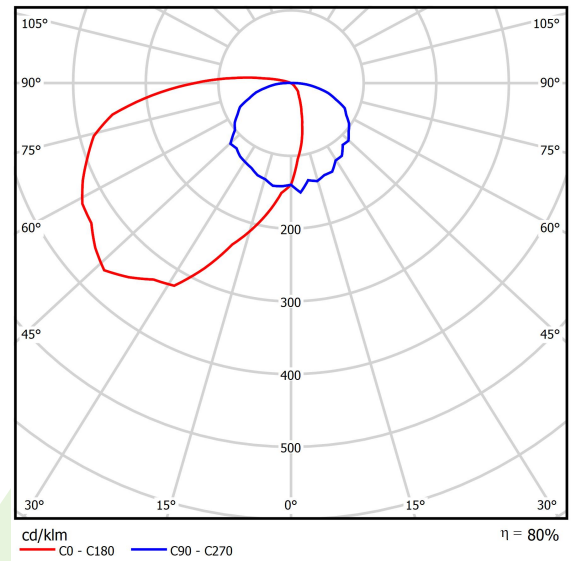

Accessories

Index 2TJ5521-5A

Name Ceiling catch

