

#### Product: KUBIK POLE 100 4S E27 POD LED MAX.15W/230V IP65 25 / L-740MM Index: 19.3157.0002.25



### Description

Light source

Lx/By

Driver

Luminaire for intercheangable LED light sources so called Retofit suitable for E27 frame. The body is made of aluminum painted with special facade paint which is resistant to weather conditions. PMMA milky colour diffuser. Very easy mounting and acess to the interior of the luminaire.

### **Product information**

Category Outdoor luminaires Family **KUBIK POLE 100** KUBIK POLE 100 4S E27 POD LED MAX.15W/230V IP65 25 / L-Name 740MM 19.3157.0002.25 Index

# Light and electrical data

**RETROFIT E27 (not included)** Luminous flux LED [Im] depending on applied light source LED power [W] depending on applied light source Luminaire luminous flux [Im] depending on applied light source

Œ


 $\mathbb{IP}_{65}$ 

depending on applied light source

IK

	Power of luminaire [W]	depending on applied light source
	Luminaire's light efficiency [lm/W]	depending on applied light source
	Color of the light [K]	depending on applied light source
	CRI	depending on applied light source
	SDCM (LED sources)	depending on applied light source
	Beam angle [°]	asymmetric light distribution
	Protection against electric shock	1
	Protection degree	IP65
	Voltage	220240 V, 5060 Hz
	Lifetime of LED sources [h]	depending on applied light source


### **Mechanical data**



Assembly	for the ground
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure)
Diffuser	PMMA opal
Impact resistant	IK08
Weight [kg]	2,05
Dimensions [mm]	100 x 100 x 740

none

## A graph of light

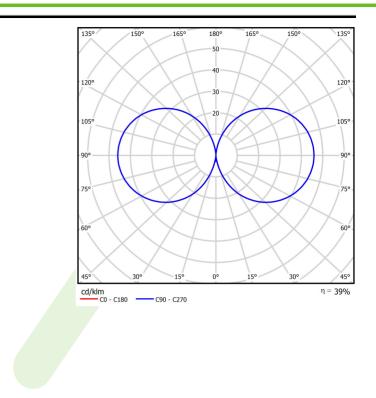



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023