

Product: ATENA LED COMPACT 34000 OPTICS-90 E IP65 04 740

Index: 19.3210.0008.04



Description

Industrial luminaire equipped with high performance LED sources. Mounting on pendants. Body made of cast aluminum, which also acts as a heat sink for LED modules. Powder coated in black (RAL 9005). The luminaire has a high degree of protection against dust and water ingress - IP65. Luminaires available with different light distribution: 60°, 90° and 120°. Application: halls, warehouses etc.

Product information

| | |
|----------|---|
| Category | Compact |
| Family | ATENA LED COMPACT |
| Name | ATENA LED COMPACT 34000 OPTICS-90 E IP65 04 740 |
| Index | 19.3210.0008.04 |



Light and electrical data


| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 35123 |
| LED power [W] | 189,5 |
| Luminaire luminous flux [lm] | 31948 |
| Power of luminaire [W] | 195 |
| Luminaire's light efficiency [lm/W] | 163,8 |
| Color of the light [K] | 4000 |
| CRI | >70 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 79,6° / 80° |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 (30° C); 100000 (35° C); 72000 (40° C); 50000 (45° C) |
| Lx/By | L70/B10 |
| Operating temperature range [°C] | -35 ÷ 45 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 7 (B10), 12 (B16), 7 (C10), 12 (C16) |

Mechanical data



| | |
|------------------|-----------------------------|
| Assembly | surface mounted on slings |
| Material | aluminum |
| Color | RAL 9005 (black) |
| Diffuser | PC (opalcent polycarbonate) |
| Impact resistant | IK08 |
| Dimensions [mm] | Ø400 x 108 |


A graph of light

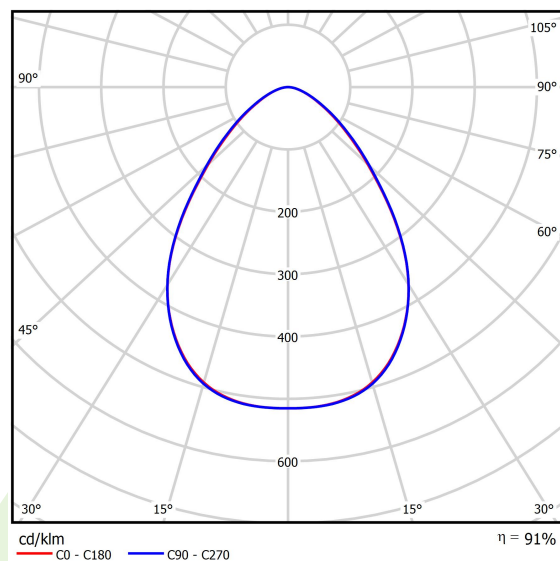

Accessories

Index 19.3210.0012.04

Name ATENA LED COMPACT
PROTECTIVE GRID FI400



Index 19.3210.0013.04

Name ATENA LED COMPACT ROTARY
HOLDER

