

Product: STREETPARK S LED COMPACT HO 5000 SHM E IP66 22 757**Index:** 19.3250.0001.22

Description

Powder painted aluminum cast housing highly weather proof. Luminaire is equipped with adjustable handle designed for mounting on posts and arms of 60 mm diameter. Level of tightness IP66. Diffuser is made of hardened glass. Following color temperatures are available: 5700 K.

Product information


Category	Compact
Family	STREETPARK LED COMPACT
Name	STREETPARK S LED COMPACT HO 5000 SHM E IP66 22 757
Index	19.3250.0001.22



Light and electrical data


Light source	LED
Luminous flux LED [lm]	5588
LED power [W]	38
Luminaire luminous flux [lm]	4404
Power of luminaire [W]	42
Luminaire's light efficiency [lm/W]	104,9
Color of the light [K]	5700
CRI	>70
SDCM (LED sources)	5
Beam angle [°]	(C0-C180) / (C90-C270) - 98,8° / 102°
Protection against electric shock	I
Protection degree	IP66
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	22 (B10), 35 (B16), 37 (C10), 59 (C16)

Mechanical data

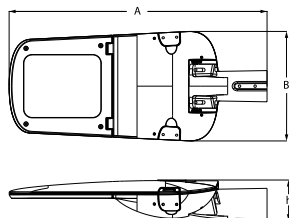

Assembly	mounted on poles
Material	aluminum
Color	RAL 9007 (dark gray)
Diffuser	SHM (hardened mat glass)
Impact resistant	IK09
Dimensions [mm]	628 x 266 x 99

A graph of light

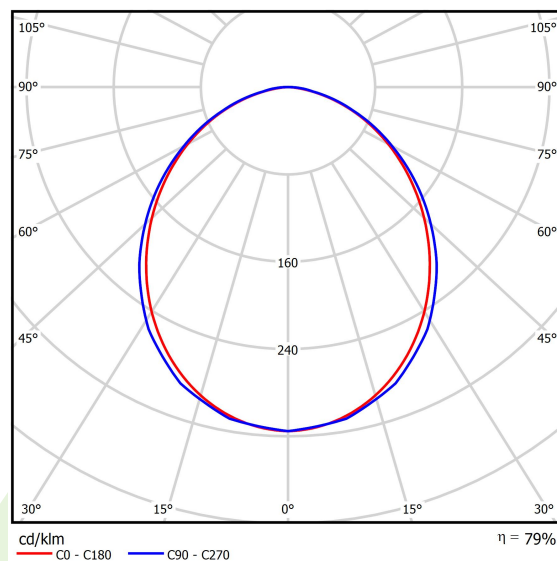

Accessories

Index 50ELR76/60

Name REDUKTOR R76/60x100

