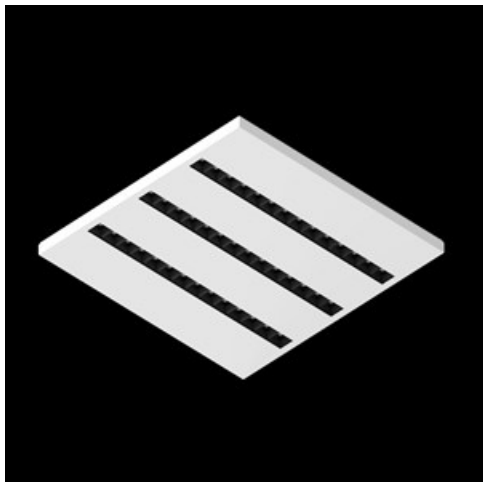


Product: DOMINO CLEAN LOW UGR LED 6300 SH RASTER DAISY-BLACK-WIDE EDD 34 IP65 840 / 592X592**Index:** 19.4057.1123.34

Description

LED luminaire dedicated to be mounted on suspended modular ceilings. Equipped with highly efficient LED light sources. The Domino Clean LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Standard colour of the luminaire is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80. Level of tightness IP65.

Product information


Category	Clean luminaires - recessed
Family	DOMINO CLEAN LOW UGR LED
Name	DOMINO CLEAN LOW UGR LED 6300 SH RASTER DAISY-BLACK-WIDE EDD 34 IP65 840 / 592X592
Index	19.4057.1123.34



Light and electrical data


Light source	LED
Luminous flux LED [lm]	6709,5
LED power [W]	33,9
Luminaire luminous flux [lm]	5105
Power of luminaire [W]	38
Luminaire's light efficiency [lm/W]	134,3
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 71,6° / 75,6°
Protection against electric shock	II
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B10 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 23 (B16), 22 (C10), 35 (C16)

Mechanical data

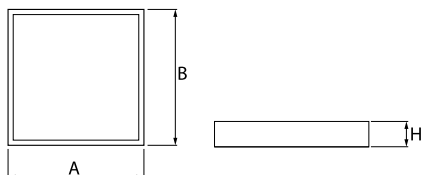

Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	RASTER (anti-glare louvre)
Impact resistant	IK08
Dimensions [mm]	592 x 592 x 50

A graph of light

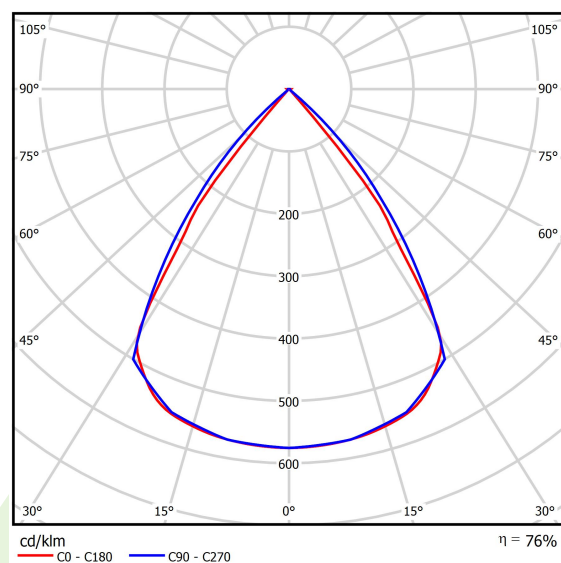

Luminous flux tolerance $\pm 10\%$. Power tolerance $\pm 10\%$.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-01-2023