

Product: AGAT CLEAN LED CRI95 14400 MICRO-PRM SH EDD IP65 940 / 1200X600 Index: 19.4073.4743.34



Description

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaries (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering "deep red" color, and R13 responsible for rendering "light orange" color). Luminary designed to module and gypsum and cardboard suspended ceilings, equipped with the highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Optical systems and diffusers mounted in an aluminum frame.

Product	information
I I OGGOL	mormation

	Category	Clean luminaires CRI95
	Family	AGAT CLEAN LED CRI95
	Name	AGAT CLEAN LED CRI95 14400 MICRO-PRM SH EDD IP65 940 / 1200X600
	Index	19.4073.4743.34

E

E

LED


 \mathbb{IP}_{65}

IK₈

Light and electrical data

Light source	LED
Luminous flux LED [lm]	15666
LED power [W]	99,2
Luminaire luminous flux [lm]	11278
Power of luminaire [W]	102,5
Luminaire's light efficiency [lm/W]	110
Color of the light [K]	4000
CRI	>95
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 88° / 91,8°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor $\cos \varphi$	>0,95
Circuit load capacity	7 (B10), 11 (B16), 11 (C10), 14 (C16)



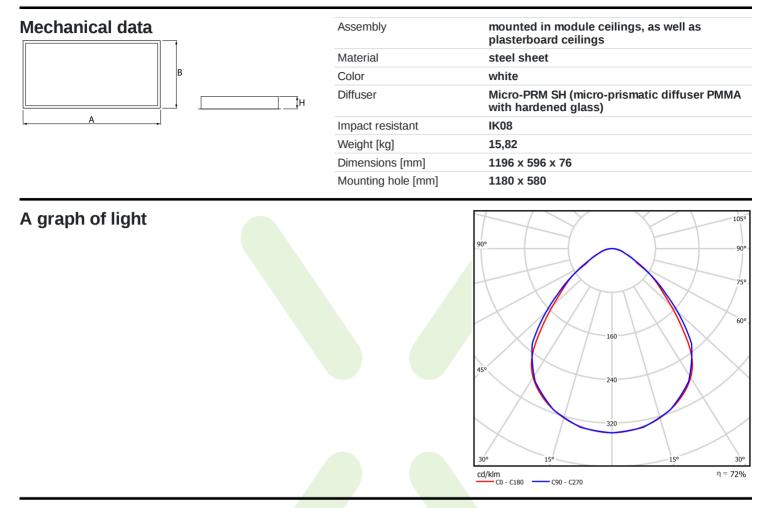

Accessories

Index 2M-X414LKPIPT5
Name Mounting clips set for plasterboard ceiling

