

**Product:** EUROPANEL LED 3800 MICRO-PRM E 34 IP20/44 830

**Index:** 19.4099.1111.34



## Description

Modern LED panel for installation in suspended ceilings or directly on the ceiling. Equipped with the highly efficient LED sources. Luminaire body made from aluminum. PMMA opal diffuser. Colour of luminaire - white. Luminaire dedicated for the public use structure like offices, conference rooms, classrooms, lecture halls etc.

## Product information

Category	<b>Recessed luminaires</b>
Family	<b>EUROPANEL LED</b>
Name	<b>EUROPANEL LED 3800 MICRO-PRM E 34 IP20/44 830</b>
Index	<b>19.4099.1111.34</b>



## Light and electrical data


Light source	<b>LED</b>
Luminous flux LED [lm]	<b>3450</b>
LED power [W]	<b>19,3</b>
Luminaire luminous flux [lm]	<b>2612</b>
Power of luminaire [W]	<b>21</b>
Luminaire's light efficiency [lm/W]	<b>124,4</b>
Color of the light [K]	<b>3000</b>
CRI	<b>&gt;80</b>
SDCM (LED sources)	<b>3</b>
Beam angle [°]	<b>(C0-C180) / (C90-C270) - 93° / 82,6°</b>
Photobiological risk class (IEC/EN 62471)	<b>RG0</b>
Protection against electric shock	<b>II</b>
Protection degree	<b>IP20/44</b>
Voltage	<b>220..240 V, 50..60 Hz</b>
Lifetime of LED sources [h]	<b>63000 (1) / 53000 (2)</b>
Lx/By	<b>L70/B50 (1) / L80/B10 (2)</b>
Operating temperature range [°C]	<b>5 ÷ 30</b>
Driver	<b>standard on/off (E)</b>
Power factor cos φ	<b>&gt;0,95</b>
Circuit load capacity	<b>29 (B10), 47 (B16), 49 (C10), 79 (C16)</b>

**Mechanical data**



Assembly	mounted in module ceilings, plasterboard ceilings or directly on the ceiling
Material	aluminum
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)
Impact resistant	IK04
Weight [kg]	3,61
Dimensions [mm]	596 x 596 x 11

**A graph of light**

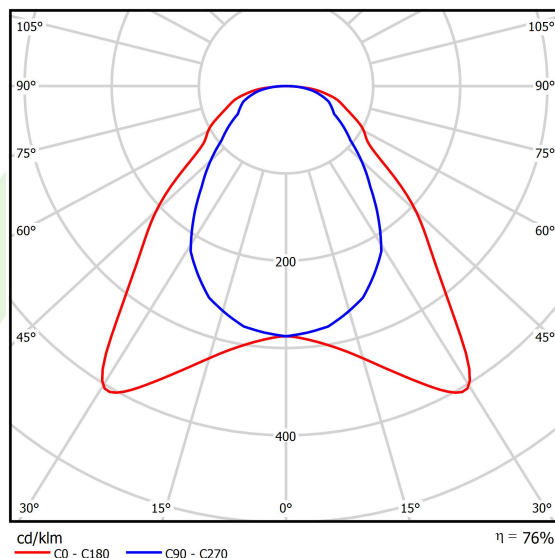

**Accessories**

Index 2C1A7392-34R

Name EUROPANEL / RIM COMPACT  
LED RECESSED ACCESSORIES  
34 / 600X600



Index 01ARTLUNCNW6

Name EUROPANEL / RIM COMPACT  
LED SURFACE ACCESSORIES  
STANDARD 34 / 600X600



Index 01ARTBLUNCNW6

Name EUROPANEL / RIM COMPACT  
LED SURFACE ACCESSORIES  
BASIC 34 / 600X600

