

**Product:** EUROPANEL LED 5800 MICRO-PRM EDD 34 IP20/44 830

**Index:** 19.4099.1313.34



## Description

Modern LED panel for installation in suspended ceilings or directly on the ceiling. Equipped with the highly efficient LED sources. Luminary body made from aluminum. PMMA opal diffuser. Colour of luminary - white. Luminary dedicated for the public use structure like offices, conference rooms, classrooms, lecture halls etc.

## Product information

Category	<b>Recessed luminaires</b>
Family	<b>EUROPANEL LED</b>
Name	<b>EUROPANEL LED 5800 MICRO-PRM EDD 34 IP20/44 830</b>
Index	<b>19.4099.1313.34</b>



## Light and electrical data


Light source	<b>LED</b>
Luminous flux LED [lm]	<b>6147</b>
LED power [W]	<b>40,5</b>
Luminaire luminous flux [lm]	<b>4653</b>
Power of luminaire [W]	<b>45,6</b>
Luminaire's light efficiency [lm/W]	<b>102</b>
Color of the light [K]	<b>3000</b>
CRI	<b>&gt;80</b>
SDCM (LED sources)	<b>3</b>
Beam angle [°]	<b>(C0-C180) / (C90-C270) - 93° / 82,6°</b>
Photobiological risk class (IEC/EN 62471)	<b>RG0</b>
Protection against electric shock	<b>II</b>
Protection degree	<b>IP20/44</b>
Voltage	<b>220..240 V, 50..60 Hz</b>
Lifetime of LED sources [h]	<b>63000 (1) / 53000 (2)</b>
Lx/By	<b>L70/B50 (1) / L80/B10 (2)</b>
Operating temperature range [°C]	<b>5 ÷ 30</b>
Driver	<b>DIM DALI (EDD)</b>
Power factor cos φ	<b>&gt;0,95</b>
Circuit load capacity	<b>12 (B10), 20 (B16), 20 (C10), 32 (C16)</b>

Mechanical data




Assembly	mounted in module ceilings, plasterboard ceilings or directly on the ceiling
Material	aluminum
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)
Impact resistant	IK04
Weight [kg]	3,61
Dimensions [mm]	596 x 596 x 11

A graph of light

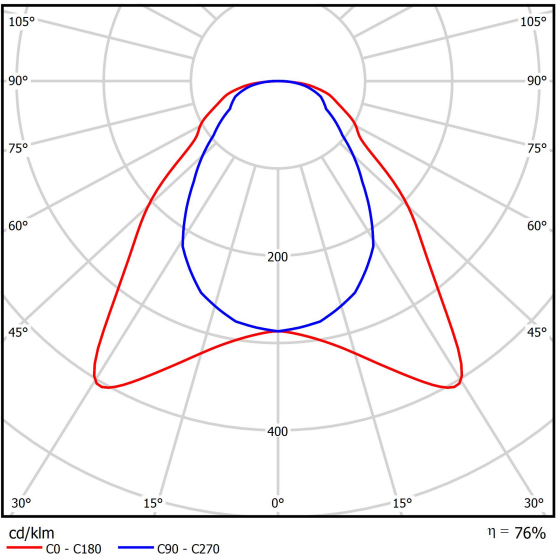

Accessories

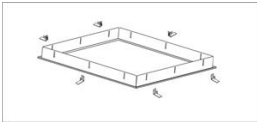Index	2C1A7392-34R
Name	EUROPANEL / RIM COMPACT LED RECESSED ACCESSORIES 34 / 600X600
	

Index	01ARTLUNCNW6
Name	EUROPANEL / RIM COMPACT LED SURFACE ACCESSORIES STANDARD 34 / 600X600
	

Index	01ARTBLUNCNW6
Name	EUROPANEL / RIM COMPACT LED SURFACE ACCESSORIES BASIC 34 / 600X600
	