

Product: X-LINE LED 4400 PLX EDD 24 840 LINE-1EL / L-1127MM Index: 19.4170.2123.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category	Surface mounted luminaires	
	Family	X-LINE LED LINE	
	Name	X-LINE LED 4400 PLX EDD 24 840 LINE-1EL / L-1127MM	
	Index	19.4170.2123.24	
		$\underbrace{}_{\text{LED}} \underbrace{}_{\text{ED}} \underbrace{}_{\text{ED}} \underbrace{}_{\text{P}_{44}} \underbrace{}_{\text{K}_{44}} \underbrace{}_{\text{Moor}} $	
Light and electrical data	Light source	ce LED	
	L construction and a		

and electrical data	Light source	LED	
	Luminous flux LED [lm]	4565	
	LED power [W]	23,4	
	Luminaire luminous flux [lm]	3043	
	Power of luminaire [W]	24,7	
	Luminaire's light efficiency [lm/W]	123,2	
	Color of the light [K]	4000	
	CRI	>80	
	SDCM (LED sources)	3	
	Beam angle [°]	(C0-C180) / (C90-C270) - 109° / 107,2°	
	Photobiological risk class (IEC/EN 62471)	RG0	
	Protection against electric shock	I	
	Protection degree	IP44	
	Voltage	220240 V, 5060 Hz	
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)	
	Lx/By	L80/B10 (1) / L70/B50 (2)	
	Operating temperature range [°C]	5 ÷ 30	
	Driver	DIM DALI (EDD)	
	Power factor cos φ	>0,95	
	Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)	



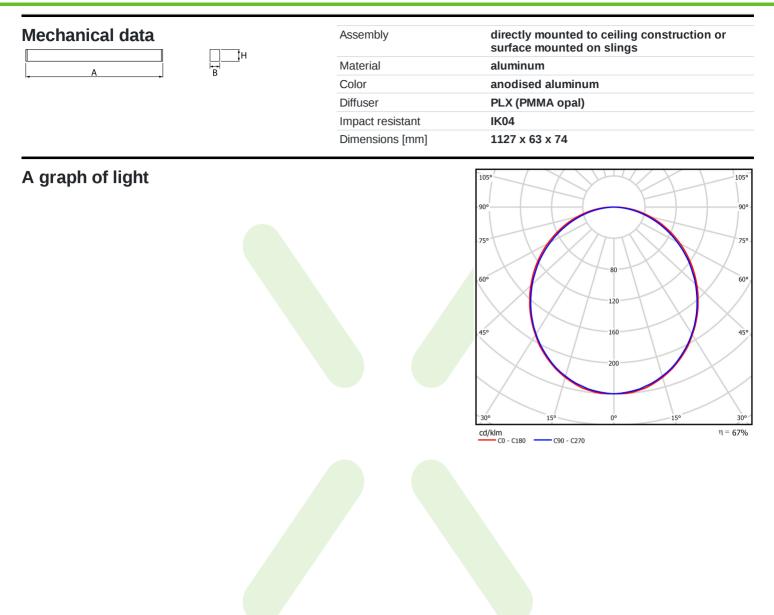




Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT



Name X-LINE Clamp for line luminaires




Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023