

Product: X-LINE LED 2600 MICRO-PRM E 24 830 LINE-S / CONNECTOR TYPE-LB 600/600 Index: 19.4176.4611.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted luminaires	
	Family X-LINE LED CONNECTOR L	
	Name X-LINE LED 2600 MICRO-PRM E 24 830 LINE-S / CONNECTOR TYPE-LB 600/600	
	Index 19.4176.4611.24	
	$\overbrace{LED} \textcircled{E} \textcircled{P}_{44} \char[K_{04}]$	Indoor
Light and electrical data	Light source LED	
	Luminous flux LED [lm] 2525	
	LED power [W] 13,3	
	Luminaire luminous flux [lm] 1902	
	Power of luminaire [W] 14,4	
	Luminaire's light efficiency [lm/W] 132,1	
	Color of the light [K] 3000	
	CRI >80	
	SDCM (LED sources) 3	
	Beam angle [°] (C0-C180) / (C90-C270) - 82	2,8° / 97,2°
	Protection against electric shock	
	Protection degree IP44	
	Voltage 220240 V, 5060 Hz	
	Lifetime of LED sources [h] 100000 (1) / 147000 (2)	
	Lx/By L80/B10 (1) / L70/B50 (2)	
	Operating temperature range [°C] 5 ÷ 30	
	Driver standard on/off (E)	
	Power factor cos φ >0,95	
	Circuit load capacity 46 (B10), 74 (B16), 72 (C10)), 115 (C16)
Mechanical data	Assembly directly mounted to ceiling constr surface mounted on slings	ruction or
	Material aluminum	
	Color anodised aluminum	
	Diffuser Micro-PRM (micro-prismatic diffus	ser PMMA)
	Impact resistant IK04	
	Dimensions [mm] 593 x 593 x 71	

A graph of light

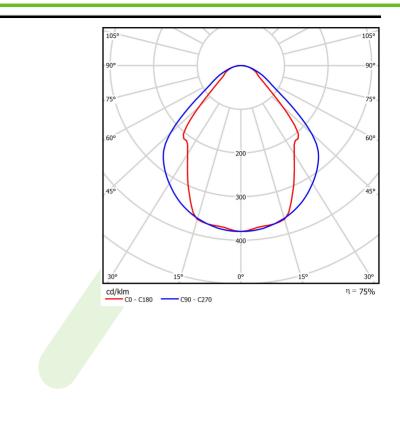






Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT






Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023