

Product: X-LINE LED 3300 MICRO-PRM E 24 840 LINE-S / CONNECTOR TYPE-LE 600/300 Index: 19.4176.6321.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Droduct information	Onterror		d huminairea
Product information		ry Surface mounte	
	Family		
	Name	TYPE-LE 600/30	0 MICRO-PRM E 24 840 LINE-S / CONNECTOR 0
	Index	19.4176.6321.24	
		CE	$\begin{array}{c} \hline \\ \hline $
Light and electrical data	Light so	ource	LED
-	Lumino	us flux LED [lm]	3436
	LED po	wer [W]	17,4
	Lumina	ire luminous flux [lm] 2588
	Power of	of luminaire [W]	19,2
	Lumina	ire's light efficiency [[m/W] 134,8
	Color of	f the light [K]	4000
	CRI		>80
	SDCM	(LED sources)	3
	Beam a	ngle [°]	(C0-C180) / (C90-C270) - 82,8° / 97,2°
	Protecti	on against electric s	hock I
	Protecti	on degree	IP44
	Voltage		220240 V, 5060 Hz
	Lifetime	of LED sources [h]	100000 (1) / 147000 (2)
	Lx/By		L80/B10 (1) / L70/B50 (2)
	Operati	ng temperature rang	ge [°C] 5 ÷ 30
	Driver		standard on/off (E)
	Power f	actor cos φ	>0,95
	Circuit I	oad capacity	22 (B10), 34 (B16), 33 (C10), 54 (C16)
Mechanical data	Assemb	bly	directly mounted to ceiling construction or surface mounted on slings
A >	Materia	1	aluminum
	Color		anodised aluminum
	Diffuser		Micro-PRM (micro-prismatic diffuser PMMA)
В	Impact	resistant	IK04

A graph of light

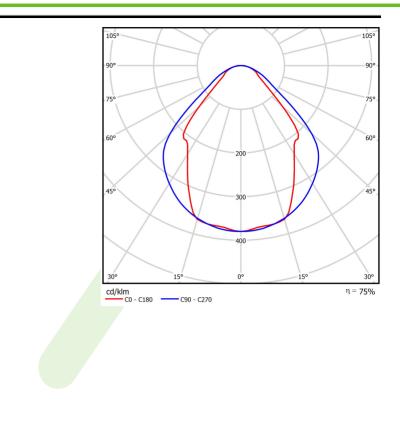






Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT






Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023