

## Product: X-LINE LED 3300 MICRO-PRM EDD 24 840 LINE-1S / CONNECTOR TYPE-LE 600/300 Index: 19.4176.6323.24



## Description


Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mour	nted luminaires
	Family X-LINE LED C	ONNECTOR L
	Name X-LINE LED 3 TYPE-LE 600/	300 MICRO-PRM EDD 24 840 LINE-1S / CONNECTO 300
	Index 19.4176.6323.	24
Light and electrical data	Light source	LED
	Luminous flux LED [lm]	3436
	LED power [W]	17,4
	Luminaire luminous flux [	[lm] <b>2588</b>
	Power of luminaire [W]	19,2
	Luminaire's light efficience	cy [lm/W] 134,8
	Color of the light [K]	4000
	CRI	>80
	SDCM (LED sources)	3
	Beam angle [°]	(C0-C180) / (C90-C270) - 82,8° / 97,2°
	Protection against electri	c shock I
	Protection degree	IP44
	Voltage	220240 V, 5060 Hz
	Lifetime of LED sources	[h] <b>100000 (1) / 147000 (2)</b>
	Lx/By	L80/B10 (1) / L70/B50 (2)
	Operating temperature ra	ange [°C] 5 ÷ 30
	Driver	DIM DALI (EDD)
	Power factor $\cos \phi$	>0,95
	Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)
Mechanical data	Assembly	directly mounted to ceiling construction or surface mounted on slings
	Material	aluminum
	Color	anodised aluminum
	Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)
	Impact resistant	IK04
	Disconstruct Incord	500 010 74

Dimensions [mm]

593 x 313 x 71

## A graph of light

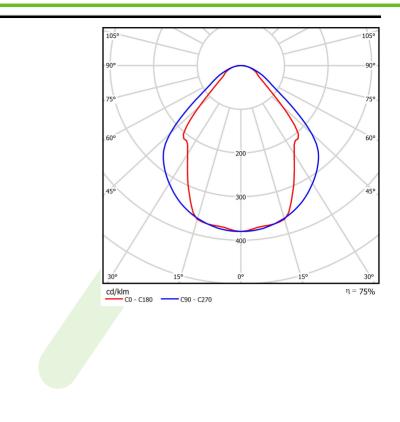





## Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT



Name X-LINE Clamp for line luminaires




Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023