

Product: X-LINE LED 3900 PLX E 24 830 LINE-S / CONNECTOR TYPE-TC 600/600/600 Index: 19.4177.1311.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category S	Surface mounted lumir	naires	
		-LINE LED CONNECT		
	Name >	K-LINE LED 3900 PLX E	0 PLX E 24 830 LINE-S / CONNECTOR TYPE-TC	
	Index 1	19.4177.1311.24		
_ight and electrical data	Light source	e	LED	
0	Luminous f	lux LED [lm]	3788	
	LED power	[W]	20	
	Luminaire I	uminou <mark>s flux [lm]</mark>	2525	
	Power of lu	minaire [W]	21,7	
	Luminaire's	light efficiency [lm/W]	116,4	
	Color of the	e light [K]	3000	
	CRI		>80	
	SDCM (LEI	D sources)	3	
	Beam angle	e [°]	(C0-C180) / (C90-C270) - 109° / 107,2°	
	Protection a	against electric shock	1	
	Protection of	degree	IP44	
	Voltage		220240 V, 5060 Hz	
	Lifetime of	LED sources [h]	100000 (1) / 147000 (2)	
	Lx/By		L80/B10 (1) / L70/B50 (2)	
	Operating t	emperature range [°C]	5 ÷ 30	
	Driver		standard on/off (E)	
	Power facto	or cos φ	>0,95	
	Circuit load	capacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)	
Mechanical data	Assembly	direc surfa	ctly mounted to ceiling construction or ace mounted on slings	
A	Material	alum	inum	
	L ^H Color	anoc	lised aluminum	
В	Diffuser	PLX	(PMMA opal)	
	Impact resi	stant IK04		
	Dimensions	s [mm] 1126	x 593 x 71	

Dimensions [mm] 1126 x 593 x 71

A graph of light

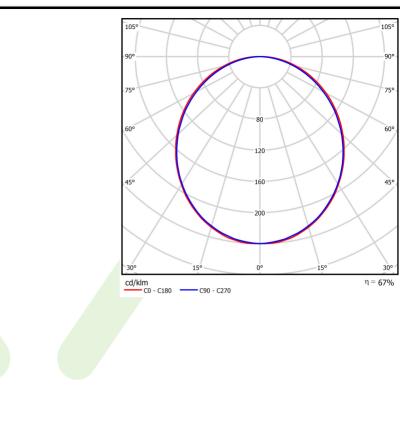






Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT






Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023