

Product: X-LINE LED 6600 PLX EDD 24 840 LINE-1S / CONNECTOR TYPE-TA 600/600/600 Index: 19.4177.3123.24



Description


Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted luminaires	Category Surface mounted luminaires	
	Family X-LINE LED CONNECTOR T		
	Index 19.4177.3123.24		
Light and electrical data	Light source LED		
-	Luminous flux LED [lm]6848		
	LED power [W] 33,7		
	Luminaire luminous flux [lm]4565		
	Power of luminaire [W] 35,3		
	Luminaire's light efficiency [lm/W] 129,3		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C1	Beam angle [°] (C0-C180) / (C90-C270) - 109° / 107,2°	
	Protection against electric shock		
	Protection degree IP44		
	Voltage 2202 4	10 V, 5060 Hz	
	Lifetime of LED sources [h] 10000	0 (1) / 147000 (2)	
	Lx/By L80/B1	l0 (1) / L70/B50 (2)	
	Operating temperature range [°C] $5 \div 30$		
	Driver DIM D/	ALI (EDD)	
	Power factor $\cos \phi$ >0,95		
	Circuit load capacity 14 (B1	0), 23 (B16), 22 (C10), 35 (C16)	
Mechanical data	Assembly directly moun surface moun	Assembly directly mounted to ceiling construction or surface mounted on slings	
A	Material aluminum	aluminum	
	_t ^µ Color anodised alun	anodised aluminum	
	Diffuser PLX (PMMA of	user PLX (PMMA opal)	
	Impact resistant IK04	stant IK04	
	Dimensions [mm] 1126 x 593 x 7	1	

Dimensions [mm]

1126 x 593 x 71

A graph of light

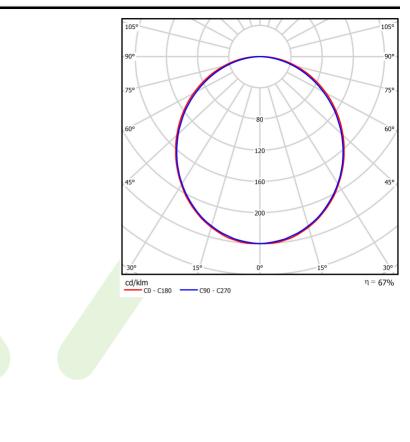





Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT



Name X-LINE Clamp for line luminaires




Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023