


Product: X-LINE LED 5200 MICRO-PRM E 24 830 LINE-S / CONNECTOR TYPE-X 600/600/600/600 Index: 19.4178.1211.24




Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted lu	
	CategorySurface mounted luminairesFamilyX-LINE LED CONNECTOR XNameX-LINE LED 5200 MICRO-PRM E 24 830 LINE-S / CONNECTOR TYPE-X 600/600/600	
	Index 19.4178.1211.24	
Light and electrical data	Light source	LED
	Luminous flux LED [lm]	5051
	LED power [W]	26,6
	Luminaire luminous flux [lm]	3804
	Power of luminaire [W]	28,2
	Luminaire's light efficiency [lm/V	V] 134,9
	Color of the light [K]	3000
	CRI	>80
	SDCM (LED sources)	3
	Beam angle [°]	(C0-C180) / (C90-C270) - 82,8° / 97,2°
	Protection against electric shocl	k I
	Protection degree	IP44
	Voltage	220240 V, 5060 Hz
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)
	Lx/By	L80/B10 (1) / L70/B50 (2)
	Operating temperature range [°	C] 5÷30
	Driver	standard on/off (E)
	Power factor cos φ	>0,95
	Circuit load capacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)
Mechanical data		irectly mounted to ceiling construction or urface mounted on slings
	Material al	luminum
	Color a	nodised aluminum
	Diffuser M	licro-PRM (micro-prismatic diffuser PMMA)
	Impact resistant	(04
	Dimensions [mm] 1:	126 x 1126 x 71

A graph of light

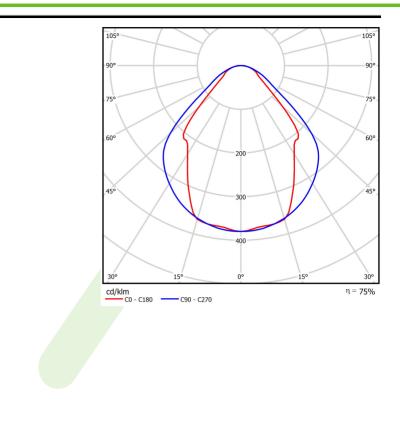






Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT






Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023