


Product: X-LINE SLIM L-DOWN LED 4400 PLX E 24 840 LINE-EL / L-1132MM S-1,5M Index: 19.4179.2121.24

Index: 19.4179.2121.24		
	Description	
Product information	Category Surface mounted lumin	aires
	Family X-LINE SLIM LED LINE	
	Name X-LINE SLIM L-DOWN L S-1,5M	ED 4400 PLX E 24 840 LINE-EL / L-1132MM
	Index 19.4179.2121.24	
	110ex 13.4173.2121.24	
		$\textcircled{E} \square \square$
Light and electrical data	Light source	LED
	Luminous flux LED [lm]	4565
	LED power [W]	23,4
	Luminaire luminous flux [lm]	2929
	Power of luminaire [W]	24,7
	Luminaire's light efficiency [lm/W]	118,6
	Color of the light [K]	4000
	CRI	>80
	SDCM (LED sources)	3
	Beam angle [°]	(C0-C180) / (C90-C270) - 96,4° / 90,2°
	Protection against electric shock	I
	Protection degree	IP40
	Voltage	220240 V, 5060 Hz
	Lifetime of LED sources [h]	100000 (1) / 147000 (2)
	Lx/By	L80/B10 (1) / L70/B10 (2)
	Operating temperature range [°C]	5 ÷ 30
	Driver	standard on/off (E)
	Power factor $\cos \phi$	>0,95
	Circuit load capacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)
Mechanical data	Assembly	surface mounted on slings
[]н	Material	aluminum
A B	Color	anodised aluminum
	Diffuser	PLX (PMMA opal)
	Impact resistant	IK04
	Dimensions [mm]	1132 x 48 x 70

A graph of light



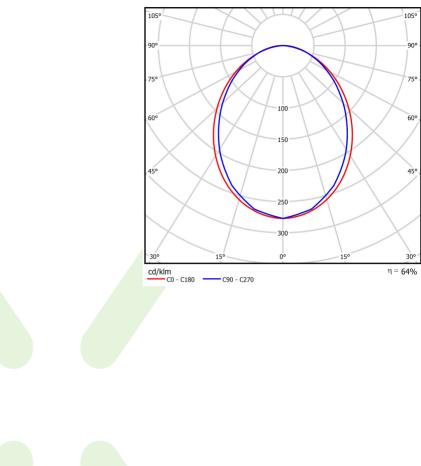




Accessories

Index 6E1-500KWAN1P-3 Name SUSPENSION NEW TYPE-A 24 LENGHT 1,5M WIRE 3X 1-POINT



Index 6E1-9875-3-1,5







Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-3X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT

