

Product: X-LINE SLIM L-DOWN LED 6600 PLX EDD 24 840 LINE-1EP / L-1702MM S-1,5M Index: 19.4179.3223.24




Description

Luminaire for building long light lines made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspension. Power supply connection only via ELmarked luminaire.

Product information	Category Surface mounted luminaires
	Family X-LINE SLIM LED LINE
	Name X-LINE SLIM L-DOWN LED 6600 PLX EDD 24 840 LINE-1EP / L- 1702MM S-1,5M
	Index 19.4179.3223.24
	$\overbrace{LED} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \textcircled{} \textcircled{} \end{array}{} \textcircled{} \textcircled{} \end{array}{} \end{array}{\end{array}}$
Light and electrical data	Light source LED
	Luminous flux LED [Im] 6848
	LED power [W] 33,7
	Luminaire luminous flux [lm] 4394
	Power of luminaire [W] 35,3
	Luminaire's light efficiency [Im/W] 124,5
	Color of the light [K] 4000
	CRI >80
	SDCM (LED sources) 3
	Beam angle [°] (C0-C180) / (C90-C270) - 96,4° / 90,2°
	Protection against electric shock
	Protection degree IP40
	Voltage 220240 V, 5060 Hz
	Lifetime of LED sources [h] 100000 (1) / 147000 (2)
	Lx/By L80/B10 (1) / L70/B10 (2)
	Operating temperature range [°C] 5 ÷ 30
	Driver DIM DALI (EDD)
	Power factor $\cos \varphi$ >0,95
	Circuit load capacity 14 (B10), 23 (B16), 22 (C10), 35 (C16)
Mechanical data	Assembly surface mounted on slings
[]Н	Material aluminum
A B	Color anodised aluminum
	Diffuser PLX (PMMA opal)
	Impact resistant IK04
	Weight [kg] 2,9
	Dimensions [mm] 1702 x 48 x 70

A graph of light

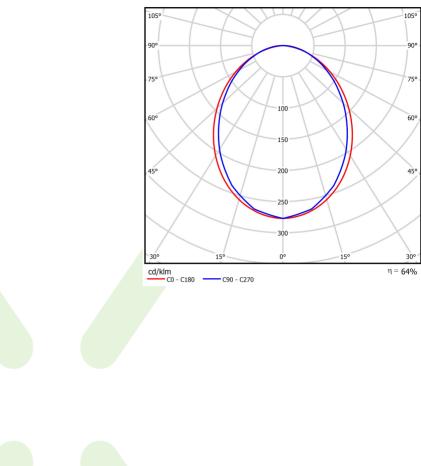





Accessories

Index 6E1-500KWAN1P-5 Name SUSPENSION NEW TYPE-A 24 LENGHT 1,5M WIRE 5X 1-POINT



Index 6E1-9875-3-1,5

Name SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT






Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023